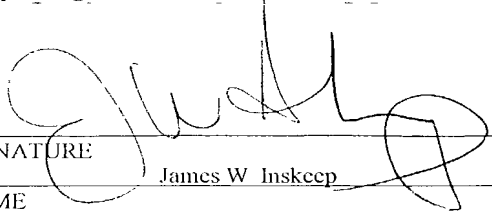


JC18 Rec'd PCT/PTO 22 JAN 2002

FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 490113-148	
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (If known, see 37 CFR 1.5)	
				10/048136	
INTERNATIONAL APPLICATION NO. PCT/US99/16641		INTERNATIONAL FILING DATE 23 July 1999		PRIORITY DATE CLAIMED None	
TITLE OF INVENTION Fluid Coupling with Rotary Actuation					
APPLICANT(S) FOR DO/EO/US Chester SAVAGE, Mark ANDERSON, Silvio, SANDVOSS					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371. 3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) The submission must include items (5), (6), (9) and (21) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input type="checkbox"/> is attached hereto (required only if not transmitted by the International Bureau) b. <input type="checkbox"/> has been communicated by the International Bureau. c. <input checked="" type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input type="checkbox"/> is attached hereto b. <input type="checkbox"/> has been previously submitted under 37 U.S.C. 154(d)(4). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)) 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5))					
<b>Items 11 to 20 below concern document(s) or information included:</b>					
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98.					
12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31. An assignment of the invention to <u>SCHOLLE CORPORATION</u>					
13. <input type="checkbox"/> A FIRST preliminary amendment					
14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment					
15. <input type="checkbox"/> A substitute specification.					
16. <input type="checkbox"/> A change of power of attorney and/or address letter					
17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter 2 and 35 U.S.C. 1.821 - 1.825					
18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4)					
19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4)					
20. <input type="checkbox"/> Other items of information					

U.S. APPLICATION NO. <u>16641</u> (37 CFR 1.5)		INTERNATIONAL APPLICATION NO. PCT/US99/16641		ATTORNEY'S DOCKET NUMBER 490113-148	
21. <input checked="" type="checkbox"/> The following fees are submitted <b>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):</b>  Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1040.00  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$890.00  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$740.00  International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$710.00  International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provision of PCT Article 33(2)-(4) ..... \$100.00  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				CALCULATIONS	
				PTO USE ONLY	
Surcharge of \$130 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e))				130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	22 - 20 =	2	x \$18.00	36.00	
Independent claims	6 - 3 =	3	x \$84.00	252.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+\$280.00		
<b>TOTAL OF ABOVE CALCULATIONS =</b>					
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.01, 1.27, 1.28).					
<b>SUBTOTAL =</b>				1,128.00	
Processing fee of \$130 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				+	
<b>TOTAL NATIONAL FEE =</b>				1,128.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property				+	
<b>TOTAL FEES =</b>				1,168.00	
				Amount to be Refunded	\$
				Charged	
a. <input type="checkbox"/> A check in the amount of \$ _____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>50-1901</u> in the amount of \$ <u>1,168.00</u> to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayments to Deposit Account No. <u>50-1901</u> . A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.					
<b>NOTE:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO Customer Number <u>25204</u>					
Oppenheimer Wolff & Donnelly, LLP 840 Newport Center Drive, Suite 700 Newport Beach, CA 92660 Tel: 949-823-6000 Fax: 949-823-6100			SIGNATURE  NAME <u>James W. Inskeep</u> REGISTRATION NUMBER <u>33,910</u>		

**FLUID COUPLING WITH ROTARY ACTUATION**

**Background of the Invention**

Field of the Invention

The present invention is in the field of fluid-flow couplings which are generally characterized as being of the "dry break" type. More particularly, the present invention relates to fluid-flow couplings which include a first (or male) part, and a second (or female) part which when connected to one another effect fluid-flow communication therebetween. When the coupling parts are connected they may be used to effect fluid-flow communication between a vessel and a conduit, for example. When the coupling parts are disconnected they mutually reseat so that fluid is not lost either from the conduit or from the vessel. Further, the present invention relates to such couplings which additionally have a guide structure removably supporting on one of the coupling parts, and guiding the other coupling part reciprocally for engagement and disengagement with the one coupling part. Further the present invention relates to such couplings that utilize a rotary handnut in order to complete the coupling and uncoupling act, thus providing for a reduced level of manual force to be applied to the coupling.

15

Related Technology

A conventional coupling structure is known in accord with United States patent No. 4,421,146 (the '146 patent), issued 20 December 1983 to Curtis J. Bond, et al. A coupling structure according to the '146 patent includes a tubular spout attached to and in fluid communication with a fluid filled vessel, such as a bag held within a cardboard box. This spout portion includes a plug member which is axially moveable between a first position closing fluid communication between the vessel and an outer portion of the spout member, and a second position opening this fluid communication. In the second position of the plug member a pair of lateral openings at an inner portion of the plug member are moved inwardly of the spout to permit fluid communication between the vessel and the outer portion of the spout.

25

A service member (i.e., the male coupling part) of the Bond '146 patent is carried in a guide structure which clamps to the spout and guides the service member for axial sliding engagement into sealing relation with the spout. The service member provides communication with a conduit, and includes a valve member closing communication between the conduit and ambient when the service member is disconnected from the spout.

30

-2-

The service member as it engages the spout is also engageable with the plug member to move it between its two positions, and engagement between the service member and plug member opens the valve in the service member. Thus, when the service member is engaged into the spout, communication between the vessel and the conduit is established.

5 Further, it is seen that the plug member of the Bond '146 patent carries an axial projection which contacts the valve member of the service member (the male coupling part), and opens this valve member.

The service member of the Bond '146 patent cannot be conveniently opened for cleaning, inspection, or replacement of the sealing member therein. It is true that the  
10 service member can be disassembled manually, but this service member contains many parts, and after the service member has been used to convey a food product, its disassembly is a messy job. Consequently, these conventional service members are sometimes discarded when a simple cleaning or replacement of an O-ring seal would allow their continued use. Again, however, because the service member according to the Bond  
15 '146 patent cannot be conveniently cleaned or fitted with a new O-ring, many users simply throw the fitting away and purchase a new one.

Another conventional coupling, which may be considered to be of hermaphrodite configuration, is known from European patent application No. 0 294 095 A1, published 7 December 1988 (the '095 application). According to the '095 application, a "male" and  
20 "female" coupling parts are brought into alignment and juxtaposition by a yoke carried on a guide housing. The male coupling part is configured as a tubular member which is axially movable by a handle on the guide housing to engage with an annular valve member carried in the female coupling part. When the male and female coupling parts are coupled with one another (i.e., by extension of the male coupling part relative to the guide housing  
25 and into the female coupling part), an inner liquid extraction flow path is separated from an outer air-entrance (or pressurized gas delivery) flow path by the annular valve member of the female coupling. In the coupled condition of the male and female couplings, the annular valve member of the female coupling part also serves as a sealing member. A  
version of this coupling is also known in which the male coupling part carries a spring-  
30 loaded internal disk valve member which closes the liquid extraction flow path of the male coupling part when the male and female coupling parts are not coupled with one another.

Further, in a conventional coupling known in accord with United States patent No. 5,816,298, issued 6 October 1998, and assigned to the same assignee at the present

-3-

application. In this coupling structure two hands were required to push the sleeve of the male part up into the female part in order to disengage the plug of the female fitting and allow fluid flow through the male sleeve. In the '298 patent the coupling utilizes a pair of opposite ears, which protrude from opposite sides of the guide portion of the male coupling member. The purpose of these ears is to allow a user of the coupling to manually push the sleeve of the male coupling part axially into the female coupling part in order open both coupling parts and allow fluid flow through the engaged coupling parts. This engagement of the coupling parts required a two step process as is described below.

The conventional coupling according to the '298 patent employs a two part axial forward movement and a two part axial rearward movement. The first movement part begins with the sleeve of the male coupling part in a fully retracted position and ends when the sleeve makes contact with the cap of the female coupling part. This movement is accomplished by the user pushing on the ears of the male coupling part so that the sleeve moves in a forward toward the female part. This movement should require a minimal amount of force. The second movement part requires more force because the user is required to push the ears of the male coupling part until the sleeve disengages the plug in the female part from it's sealed position, and engages this plug onto the distal end of the male coupling part, thus allowing fluid flow through the engaged coupling parts. At this time a spring of the male coupling part is compressed and a latch on the male coupling part engages onto a ledge or flange of the female coupling part. This engagement of the latch locks the two coupling parts together, thus providing a secure engagement of the two coupling parts during fluid flow.

Disengagement of the conventional coupling according to the '298 patent is accomplished by unlatching the latch, and squeezing with the fingers on a rear flange of the guide portion of the male coupling part and the pair of ears. This action sequentially disengages the latch from the ledge or flange of the female coupling part, and subsequently allows the combination of spring force and manually applied force to both withdraw the male coupling part from within the female coupling part, and to push the sleeve of the male coupling part back to a sealing position so as to shut off fluid flow from the male coupling part. Withdrawal of the male coupling part also positions and engages the plug of the female coupling part once again into a sealing position. Thus, fluid flow through the disengaged coupling parts is prevented. In order to disengage the male coupling part from the female coupling part, a considerable manually applied force is required. In order

-4-

to apply this manual withdrawal force, once again two hands are required, and are used to apply a balanced squeeze between the ears of the male coupling part and a flange at the rear of this coupling part in order to effect a withdrawal force on the probe portion of the male coupling part. This withdrawal force withdraws the male probe from the female coupling part, and also restores the plug of the female coupling part to a sealed position within the female coupling part.

### Summary of the Invention

In view of the deficiencies of the related technology, a need exists for a coupling structure which provides ease of use, and a general reduction in the amount of manual force required of a user when effecting engagement and disengagement of the coupling parts. That is, not only must a minimum of force be required on the part of a user, but also only a minimal engagement force is allowed to be transferred to a container carrying the female coupling part.

Still further, a need exists for such a coupling structure which is of low retained volume when the components of the coupling are disconnected from one another.

Additionally, a need can be seen to exist in view of the deficiencies of the related technology for such a coupling structure which allows the male coupling part to be opened for inspection, cleaning, and service (such as replacement of an O-ring sealing member) without the male coupling part being attached to a female coupling part.

An additional object for this invention is to provide a coupling structure which will function properly with a fluid having pieces, chunks, or particles in the fluid.

Accordingly the present invention provides a fluid coupling structure having a male coupling part defining a fluid flow path, the male coupling part being removably engageable with a female coupling part to open a mutual fluid flow path therethrough. The male coupling part includes an individual valve element having a respective closed first position, and this valve element moves to an opened second position in response to axial advancement of a male probe portion of the male coupling part to a forward position of potential engagement with a female coupling part. The male coupling part comprising: a guide structure reciprocally carrying the male probe portion between the closed first position and the opened second position. The guide structure including support means for being supported removably on a female coupling part, and further including means effective when the male coupling part is supported on the female coupling part for aligning

-5-

and guiding the male probe portion in reciprocation between the closed first position and the opened second position engaged with a female coupling part. The guide structure carrying a rotational actuator member, which rotational actuator member and the male probe portion include cooperating means for reciprocating the male probe portion axially  
5 between the first and the second positions in response to rotation of the rotational actuator member.

According to another aspect, the present invention provides a male fluid coupling device for use in conjunction with a female fluid coupling device, said male fluid coupling device defining a fluid flow path, said male and female fluid coupling devices being  
10 removably engageable with one another to communicate the fluid flow path with another fluid flow path defined within said female coupling device, said male fluid coupling device including a male probe portion carried reciprocally within a guide structure supportable upon the female coupling device, said male coupling device also comprising a valve element on said male probe portion and having a closed first position and relatively  
15 moving to an open second position in response to reciprocation of said male probe portion relative to said guide structure, and a rotational actuator portion manually relatively rotational relative to said guide portion to move said male probe portion axially in reciprocation.

An advantage of the present invention is that the male coupling part can be opened  
20 for cleaning and inspection without the need to disassemble this male coupling part. Moreover, the male coupling part does not rely upon its being coupled with a female coupling part to effect this opening of the flow path through the male coupling part. Instead, relative axial movement of the guide structure and male coupling part precipitated by movement of the handnut, is effective to open the male coupling part.

25 Further, an advantage of the present invention resides in the ease of actuation of the male coupling part, which may be engaged with and disengaged from the female coupling part using only a minimal level of manual force. Thus, those having a relatively limited hand strength may nevertheless operate the present inventive coupling device without difficulty.

30 These and additional objects and advantages of the present invention will be apparent from a reading of the following detailed description of an exemplary preferred embodiment of the invention taken in conjunction with the appended drawing Figures, which are briefly described immediately below.

### **Brief Description of the Drawing Figures**

Figure 1 provides a somewhat schematic view of a fluid dispensing system with a  
5 portion of a paperboard box part of the system broken away for clarity of illustration, and including a fluid-filled vessel (i.e., a bag-in-box container) connecting to a fluid conduit via a coupling structure embodying the invention;

Figure 2 provides a fragmentary perspective view, partially in cross section, of a female coupling part carried on the container seen in Figure 1;

10 Figure 3 is a perspective view of the male coupling part seen in Figure 1, and is presented at an enlarged size for clarity of illustration;

Figure 4 provides an exploded perspective view of the male coupling part embodying the present invention;

Figure 5 is a longitudinal cross sectional view of the male coupling member  
15 mounted to but not engaged with a female coupling member, with the female coupling member in its closed position;

Figure 6 provides a fragmentary cross sectional view showing a male coupling part mounted to the female coupling part and engaged with this female coupling part so that both the male and female coupling parts are opened, and fluid may flow between these  
20 coupling parts;

Figure 7 is similar to Figure 5, and illustrates an alternative embodiment of a male coupling part mounted to but not engaged with a female coupling part;

Figure 8 is similar to Figure 6, and illustrates the alternative embodiment of the male coupling part coupled to a female coupling part so that both the male and female  
25 coupling part are opened and fluid may flow between these coupling part;

Figure 9 provides a perspective and somewhat schematic view of a fluid dispensing system with a portion of a cardboard box part broken away for clarity of illustration, and including a fluid-filled bag connecting to a fluid conduit via a connector assembly according to a second embodiment of the invention;

30 Figure 10 provides a fragmentary perspective view, partially in cross section, of a female connector part carried on the container seen in Figure 9;

Figure 11 is a perspective view of the male connector part seen in Figure 9, and is presented at an enlarged size for clarity of illustration;

Figure 12 provides an exploded perspective view of the male connector part



embodying the present invention;

Figure 13 is a longitudinal cross sectional view of the male connector mounted to but not engaged with a female connector member, with the female connector member in its closed position;

5        Figure 14 provides a fragmentary cross sectional view showing a male connector part mounted to and engaged with the female connector part so that both the male and female connector parts are opened, and fluid may flow between these connector parts;

Figure 15 is similar to Figure 13, and illustrates an alternative embodiment of a male connector part mounted to but not engaged with a female connector part;

10        Figure 16 is similar to Figure 14, and illustrates the alternative embodiment of the male connector part coupled to a female connector part so that both the male and female connector parts are opened and fluid may flow between these connector part;

Figure 17 provides a perspective view of the male connector part as is seen in Figure 16; and

15        Figure 18 provides a perspective view of the male connector part as is seen in Figure 15.

#### **Detailed Description of Several Exemplary Preferred Embodiments of the Invention**

A fluid dispensing system 10 is schematically depicted in Figure 1. In general and  
20        according to the exemplary preferred embodiment of this invention, but without limitation, this fluid dispensing system 10 includes a liquid-filled vessel or container 12, which may be connected to a dispensing pump (not shown) by a conduit 14. The container 12 may be of any desired construction, but the illustrated container is of the bag-in-box configuration. Thus, the container 12 includes an outer shape-retaining box 16, which in the illustrated  
25        embodiment is formed of corrugated paperboard, and an inner flexible bag 18 (only a portion of which is visible in figure 1) which preferably is fabricated of plastic sheet.

Viewing Figures 1-6 in conjunction with one another, and viewing first Figure 2 in particular, this Figure illustrates that a side wall 16a of the box 16 defines a keyhole-shaped cutout 20. This cutout 20 allows a female coupling part 22, which is mounted to  
30        and communicates with the interior space of bag 18, to be extended partially outwardly through this cutout 20. Once the female coupling part is extended from within the box 16 partially outwardly through the cutout 20, it is there retained in a lower extent of the cutout 20 by the cooperation of a pair of axially spaced apart flanges 22a and 22b on the coupling

-8-

part 22 (best seen in Figure 5). These spaced apart flanges 22a and 22b capture between them a portion of the wall 16a of box 16 at each side and around the bottom of cutout 20. The female coupling part 22 is itself trapped in the lower extent of the cutout 20 by a keyhole-shaped portion 20a of the box wall 16a (viewing Figures 1 and 2). As is also best  
5 seen in Figures 1 and 2, the keyhole-shaped portion 20a is hingably attached at its upper extent to the wall 16a of the box 16. Consequently, the keyhole-shaped portion 20a may be manually hinged out of the way while the female coupling part 22 is introduced into and is slid downwardly along cutout 20 into the lower extent of this cutout. After the female coupling part 22 is in the lower extent of cutout 20, manual return of the keyhole-  
10 shaped portion 20a to the position seen in Figures 1 and 2 retains the female coupling part 22 in the cutout 20 of the wall 16a.

It is seen further in Figure 5 that the female coupling part 22 defines an axially extending fluid flow passage 22' and has an inner flange 24 to which the wall 18a of bag 18 is sealingly secured (i.e., at an opening of this bag). Consequently, the female coupling  
15 part 22 provides access to the interior volume of the bag 18 and container 12. That is, the liquid contents of the bag 18 communicate with the female coupling part 22, and may flow outwardly via this coupling part. The container 12 and the female coupling part 22 are conventional. Thus, without further explanation than that provided herein, it will be understood by those ordinarily skilled in the pertinent arts that the female coupling part 22  
20 includes a removable plug member 26 (seen in Figure 5). This plug member 26 is seen in Figure 5 removably closing a flow path or passage 28 through the female coupling part 22. At its distal end (i.e., furthest from the box 16) the female coupling part 22 includes a radially outwardly extending mounting flange 30. This mounting flange 30 provides for mounting of a male coupling part 32 to the female coupling part 22. This mode of  
25 mounting a male coupling part to the conventional female coupling part 22 will be familiar from the conventional teaching of the '298 patent referenced above. Thus, it will be understood that the illustrated and described mode of mounting of the male coupling part to the female coupling part is exemplary only, and is not limiting of the present invention.

Figures 3, 4, 5, and 6 in conjunction with one another illustrate one embodiment of  
30 a male coupling part 32 embodying the present invention, which is also seen in Figure 1 mounted to the female coupling part 22 in order to connect the conduit 14 in fluid flow communication with the liquid within the bag 18 of container 12. In Figure 3, the male coupling part 32 is seen from a perspective similar to that of Figure 1, which provides a

Also seen in Figure 3 is a rearwardly extending hose barb portion 38 of the male probe portion 36, and a fragmentary portion of a nut member 40, having a plurality of resilient fingers 40a engaging at a distal end portion of these fingers into a circumferential groove 42 of the male probe portion 36. This nut member 40 is effective to move the male probe portion 36 axially (i.e., into and from the female coupling part 22) in response to rotation of the handnut member 34 (recalling arrow 34a), as will be explained below.

As is seen in Figures 4, 5, and 6, (and viewing Figure 4 in particular) both the manually rotational actuator portion 34 (i.e., the handnut 34) and the male coupling portion 36 are movably carried on an elongate guide portion 44 of the male coupling part 32. This elongate guide portion 44 both carries the actuator member 34 for relative rotation, and also carries the male probe portion 36 for relative axial movement. In order to provide for the male coupling portion to mount in axial alignment to the female coupling portion, the guide portion 44 at a forward end surface 44a defines means (indicated with arrowed numeral 44b) for removably mounting to the female coupling part 22. This mounting means 44b in the exemplary embodiment provides for coaxial alignment of the male and female coupling parts 32 and 22, and also provides for immobilization of these coupling parts (i.e., with respect to relative axial movement). In other words, the mounting means 44b both prevents relative axial movement of the coupling parts 22 and 32 while the male probe portion 36 enters and withdraws from the female coupling part 22, and reacts axial forces between these coupling parts.

In the illustrated exemplary embodiment, the mounting means 44b includes a forward wall portion 44c of the guide member 44, which wall carries a crescent-shaped flange 44d defining a radially inwardly opening groove 44e. The groove 44e receives the

mounting flange 30 of the female coupling part 22, and traps this flange against the surface 44a. Thus, axial relative movements of the coupling parts are prevented.

The male coupling part 32 also includes mechanization for translating rotational relative motion of the actuator member 34 into relative axial motion of the male probe portion 36. In order to provide for relative rotation of actuator member 34 on the guide portion 44, this guide portion defines a pair of elongate, axially extending arcuate tangs 46, defining between them both an axially extending passage 46', and a pair of elongate axially extending guide slots 48. Each of the pair of tangs 46 includes a pair of side surfaces 46a and 46b, which bound the guide slots 48, and a radially outwardly disposed arcuate surface 46c. The nut member 40 includes an annular portion 50, from which axially extends the plurality of fingers 40a, and radially from which extends a diametrically opposed pair of protrusions 52. At their radially outer surfaces 52a, the protrusions 52 each define a respective circumferentially interrupted thread portion 54. These thread portions 54 are at diametrically opposed locations, viewing Figures 5 and 6. The thread portions 54 are in effect axially and circumferentially extending helical rib portions defined on the radially outer surfaces 52a of the protrusions 52. Actuator member 34 includes an annular end wall portion 34b against which the nut member 40 is engageable to define one extreme of axial relative movement for this nut member (and for the male probe portion 36).

The actuator member 34 is rotationally carried on the surfaces 46c of the tangs 46, and defines a radially inwardly disposed helical groove (i.e., a female thread) 56. As will be appreciated from consideration of Figures 5 and 6, the female thread within the actuator 34 is provided in the form of a double-start thread, so that a pair of the grooves 56 are presented at diametrically opposite locations. The thread portions 54 of the nut member 40 are threadably received into the threads 56 of the actuator 34. In order to provide axially location for the actuator member 34 on the guide portion 44, this guide portion includes in the present embodiment, a radially outer reentrant collar portion 58 cooperating with the remainder of the guide portion to define an axially disposed groove 60. The actuator member 34 has a cylindrical end portion 34c which is rotationally received into the groove 60. Within the groove 60, the collar portion 58 defines a circumferentially continuous radially inwardly disposed groove 62, and the portion 34c of actuator 34 includes a radially outwardly disposed circumferential rib 64. The rib 64 is movably received into groove 62 to axially locate the actuator 34 while allowing relative rotation of

-11-

this actuator portion (i.e., in the nature of a hand nut). As is seen in the drawing figures, the actuator 34 is preferably provided with surface features (such as ribs, grooves, stippling, diamond pattern, knurling, etceteras) which provide for more effective manual grasping of the actuator portion 34. Further, it will be noted that the collar portion 58 has similar surface treatment features on a radially outward surface portion 58a thereof. Thus, the collar portion 58 may be manually grasped if necessary in order to provide a torque balance on the male coupling part 32 allowing the actuator 34 to be manually relatively rotated without the male coupling part rotating relative to the female coupling part during insertion or withdrawal of the male probe portion 36.

As is seen in Figure 5, the male coupling part 32 may be mounted to the female coupling part 22, and the actuator member 34 may then be manually rotated relative to the guide portion 44 so that the male probe portion 36 is axially moved from the first position seen in Figure 5 by action of the thread portions 54 of nut member 40 acting in thread 56 of the actuator member 34. The nut member 40 is thus moved axially, while the protrusions 52 are guided along slots 48, with the fingers 40a transferring axial force to the male probe portion 36. The result is that the male probe portion 36 moves axially relatively to the guide portion 44 (and relative to the female coupling part 22) from the position seen in Figure 5 to that position seen in Figure 6. It is noted in Figure 6, that a sealing sleeve 66 carried on the male probe portion 36 includes an outwardly extending flange portion 66a, which engages the end wall 44c of the guide portion 44. Thus, as the male probe portion 36 is advanced through the annular wall 44c, the sleeve 66 is relatively retracted to uncover fluid flow ports 68. This opening of the male coupling part is not dependent upon the male coupling part being engaged with a female coupling part, and may be employed to clean the male coupling part, if desired.

However, as is seen in Figure 6, when the male coupling part 32 is mounted to a female coupling part, and the actuator 34 is relatively rotated to advance the male probe portion 36, then this male probe portion at a head feature 70 thereof engages into the plug member 26 of the female coupling part. This engagement of the head feature is effective with further forward movement of the male probe portion 36 (i.e., because of continued relative rotation of the actuator member 34) to carry the plug member 26 inwardly of the bag 18, thus opening the flow passage 28. It will be understood that relative rotation of the actuator 34 in the opposite direction is effective to return the male and female coupling parts from their conditions seen in Figure 6 to the conditions of Figure 5. As the male

probe portion 36 is withdrawn from the female coupling part 22, a spring 66b is effective to move sleeve 66 once again across ports 68, closing these ports. As will be understood, in the conditions of the male and female coupling parts seen in Figure 5, the male coupling part maybe dismounted from the female coupling part by lateral relative movement (i.e.,  
5 removing the mounting flange 30 from within the crescent shaped flange 44d and groove 44e of the guide portion 44 – recalling the description above of Figure 4).

Figures 7 and 8 depict a second embodiment of the invention. In order to provide reference numerals for use in describing this alternative embodiment of the invention, features which are the same as (or which are analogous in structure or function to) those  
10 features depicted and described above, are referenced in Figures 7 and 8 with the same numeral used above, and increased by one-hundred (100). As can be seen it Figures 7 and 8 the rotary actuator (i.e., handnut 134) is not axially relatively immovable while being rotated, as was the actuator handnut 34 in the first embodiment. Rather, as this handnut 134 is rotated it also moves axially forward or backward along the guide portion 144  
15 depending of the direction of relative rotation. As the handnut 134 is moved rotationally and axially it effects simultaneous axial movement of the nut member 140 and of the male probe portion 136 by cooperation of the nut member 140 between a pair of axially spaced apart and radially inwardly extending flanges 72 defined by an inner tubular portion 74 of the actuator member 134. That is, although the so-called nut member 140 serves as a  
20 thrust collar, it has no real function in this embodiment as a “nut.”

An alternative embodiment of a fluid dispensing system of bag-in-box configuration is schematically depicted in Figure 9. In order to obtain reference numerals for us in describing this embodiment of the invention, features which are the same as or analogous in structure or function to features of the first-described embodiment are  
25 indicated using the same numeral used above, and increased by two-hundred (200). In general, this fluid dispensing system 210 includes a liquid-filled vessel or container 212, which may be connected to a dispensing pump (not shown) by a conduit 214. The container 212 may be of any desired construction, but the illustrated container is of the bag-in-box configuration with an outer shape-retaining box 216, which in the illustrated  
30 embodiment is formed of corrugated cardboard, and an inner flexible bag 218 (only a portion of which is visible in figure 1). Preferably, the bag 218 is fabricated of plastic sheet.

Viewing Figures 9-14 in conjunction with one another, and viewing first Figure 10 in particular, this Figure illustrates that a side wall 216a of the box 16 defines a keyhole-shaped cutout 220. This cutout 220 allows a female connector part 222, which is mounted to and communicates with the interior space of bag 218, to be extended partially outwardly through this cutout 220. Once the female connector part 222 is extended from within the box 216 partially outwardly through the cutout 220, it is there retained in a lower extent of the cutout 220 by the cooperation of a pair of axially spaced apart flanges 222a and 222b on the connector part 222 (best seen in Figure 13). These spaced apart flanges 222a and 222b capture between them a portion of the wall 216a of box 216 at each side and around the bottom of cutout 220. The female connector part 222 is itself trapped in the lower extent of the cutout 220 by a keyhole-shaped portion 220a of the box wall 216a (viewing Figures 9 and 10). As is also best seen in Figures 9 and 10, the keyhole-shaped portion 220a is hingably attached at its upper extent to the wall 216a of the box 216. Consequently, the keyhole-shaped portion 220a may be manually hinged out of the way while the female connector part 222 is introduced into and is slid downwardly along cutout 220 into the lower extent of this cutout. After the female connector part 222 is in the lower extent of cutout 220, manual return of the keyhole-shaped portion 220a to the position seen in Figures 9 and 10 retains the female connector part 222 in the cutout 220 of the wall 216a.

It is seen further in Figure 13 that the female connector part 222 has an inner flange 224 to which the wall 218a of bag 218 is sealingly secured (i.e., at an opening of this bag). Consequently, the female connector part 222 provides access to the interior volume of the bag 218 and container 212. That is, the liquid contents of the bag 218 communicate with the female connector part 222, and may flow outwardly via this connector part. It will be understood that the female connector part 222 includes a movable plug member 226 (seen in Figure 13). This plug member 226 is seen in Figure 13 removably closing a flow path or passage 228 through the female connector part 222. At its distal end (i.e., furthest from the box 216) the female connector part 222 includes a radially outwardly extending mounting flange 230. This mounting flange 230 provides for mounting of a male connector part 232 to the female connector part 222. That is, as will be seen, the male connector part 232 is moved laterally relative to the female connector part 222 so that a grooved stirrup 232a of the male connector part catches and traps the flange 230. Thus, the male and female connector parts mutually hold one another in axial alignment, and

relative axial motion of these connector parts is prevented.

Figures 11, 12, 13, and 14 in conjunction with one another illustrate one embodiment of a male connector part 232 embodying the present invention, which is also seen in Figure 9 mounted to the female connector part 222 in order to connect the conduit 214 in fluid flow communication with the liquid within the bag 218 of container 212. In Figure 11, the male connector part 232 is seen from a perspective similar to that of Figure 9, which provides a good view of a rotational manual actuator or handnut portion 234 of this male connector part. As is represented by the double-headed rotation arrow 234a adjacent to the handnut 234 in Figure 11, this handnut portion 234 is manually rotational relative to the remainder of the male connector part 232, and is effective (as will be explained) to insert and withdraw the forward end portion of a male probe part 236 (best seen in Figures 13 and 146) into and from the female connector part 222, dependent upon the direction of manual rotation of the handnut portion 234.

As is seen in Figures 13 and 14, the male probe part 236 defines a flow passage indicated with numeral 236'. Also seen in Figure 11 is an elbow and hose barb member 238 of the male probe portion 236, and a fragmentary portion of a nut member 240, having a plurality of resilient fingers 240a engaging at a distal end portion of these fingers into a circumferential groove 242 of the male probe portion 236 (as is best seen in Figure 12). This nut member 240 is effective to move the male probe portion 236 axially (i.e., into and from the female connector part 222) in response to rotation of the handnut member 234 (recalling arrow 234a), as will be explained below. The elbow and hose barb member 238 provides for connection of conduit 214 to the male probe portion 236, and also provides for the conduit to resist turning of this male probe portion as the actuator 234 is rotated to effect connecting or disconnecting of the connector parts 222 and 232, as will be seen.

As is seen in Figures 12, 13, and 14, (and viewing Figure 12 in particular) both the manually rotational actuator portion 234 (i.e., the handnut 234) and the male connector portion 236 are movably carried on a guide portion 244 of the male connector part 232. This guide portion 244 rotationally carries the actuator member 234 for relative rotation, and carries the male probe portion 236 for relative axial movement. At its forward surface 244a, the guide portion 244 defines the stirrup 232a for mounting to the female connector part 222. As was pointed out above, this stirrup 232a provides for coaxial alignment of the male and female connector parts 232 and 222, and for relative axial immobilization of these connector parts. In other words, the stirrup 232a captures the flange 230, holds the



connector parts 222 and 322 in axial alignment, and restricts relative axial movement of the connector parts 222 and 232 while the male probe portion enters and withdraws from the female connector part.

In the illustrated embodiment, the guide portion 244 includes a forward wall  
 5 portion 244b, which defines the surface 244a and carries the crescent-shaped stirrup 232a. This stirrup 232a defines a radially inwardly opening groove 244c for laterally receiving the mounting flange 230 of the female connector part 222. It will be noted that the guide portion 244 defines a forward, centrally located opening 244d, through which the forward portion 236a of the male probe portion 236 extends in order to engage with the female  
 10 connector part 222, viewing Figure 12.

The male connector part 232 also includes mechanization for translating rotational relative motion of the handnut 234 into relative axial motion of the male probe portion 236. In order to provide for relative rotation of the handnut 234 on the guide portion 244, this guide portion defines a collar part 246 defining a radially inwardly disposed  
 15 circumferential groove 248. A forward portion 234b of the actuator 234 defines a radially outwardly disposed circumferential rib 250. The rib 250 is rotationally captured in the groove 248, so that the actuator 234 is rotationally carried on the guide portion 244. The nut member 240 includes an annular portion 240b, from which axially extends the plurality of fingers 240a, and radially outwardly from which extends a diametrically  
 20 opposed pair of angulated thread sections 252.

The actuator member 234 is rotationally carried by the guide member 244, and defines a radially inwardly disposed double-start female thread) 254. The thread sections 252 of the nut member 240 are threadably received into the thread 254 of the actuator 234. As is seen in the drawing figures, the actuator 234 is preferably provided with surface  
 25 features (such as ribs, grooves, stippling, a raised diamond pattern, knurling, etcetera) which provide for more effective manual grasping of the actuator 234.

As is seen in Figure 13, the male connector part 232 may be mounted to the female connector part 222, and the actuator member 234 may then be manually rotated relative to the guide portion 244 so that the male probe portion 236 is axially moved (i.e., by action  
 30 of thread sections 252 in double-start female thread 254) from the first position seen in Figure 13 toward and then to the second position seen in Figure 14. The nut member 240 is thus moved axially of the male connector part, with the fingers 240a transferring axial force to the male probe portion 236. The result is that the male probe portion 236 moves

axially relatively to the guide portion 244 (and relative to the female connector part 222) from the position seen in Figure 13 to that position seen in Figure 14.

It is noted in Figure 14, that a sealing sleeve 258 carried on the male probe portion 236 includes an outwardly extending flange part 258a. This flange part 258a encounters the wall portion 244b of the guide portion 244 and is thus prevented from further forward axial motion as the male probe portion 36 advances into the female connector part 222. The result is that fluid flow ports 260 of the male probe portion 236 are uncovered. As the male probe portion 236 continues forwardly into the female connector part (considering the change in relative positions of component parts from Figure 13 to Figure 14), a head portion 262 of the male probe portion 236 encounters and is received into a recess 264 defined in plug member 226. The head portion 262 is a "snap" fit into the recess 264, so that the plug member 226 is retainingly but removably attached to the head portion 262.

Further, it is to be noted that the opening of the male connector part 232 is not dependent upon the male connector part being engaged with a female connector part 222. Thus, the actuator 234 may be manually rotated in the appropriate direction even though the male connector part 232 is not connected to a female connector part, with the result that the male probe portion 236 is extended forwardly of the guide member 244. In this position of the male probe portion 236, the ports 260 are uncovered by sliding of the sealing sleeve 258 rearwardly to uncover these ports.

However, as is seen in Figure 14, when the male connector part 232 is mounted to a female connector part, and the handnut 234 is relatively rotated to advance the male probe portion 236, then this male probe portion at a head feature 270 thereof engages into the plug member 226 of the female connector part. This engagement of the head feature is effective with further forward movement of the male probe portion 236 (i.e., because of continued relative rotation of the handnut 234) to carry the plug member 226 inwardly of the bag 218, thus opening the flow passage 228.

It will be understood that relative rotation of the actuator 234 in the opposite direction is effective to return the male and female connector parts from their positions seen in Figure 14 to the relative positions of Figure 13. As the male probe portion 236 is withdrawn from the female connector part 222, a spring 258b is effective to move sleeve 258 once again across the ports 260, closing the flow path 236' in male probe portion 236. Once the male probe portion 236 is withdrawn from within the female connector part 222, the male connector part 232 can be moved laterally to dismount from the female connector

part at flange 230 (i.e., removing the mounting flange 230 from within the crescent stirrup 232a – recalling the description above of Figure 12).

Figures 15, 16, 17, and 18 depict another embodiment of the invention. In order to provide reference numerals for use in describing this alternative embodiment of the invention, features which are the same as (or which are analogous in structure or function to) those features depicted and described above, are referenced in these Figures with the same numeral used above, and increased by three-hundred (300). As can be seen in Figures 15-18, in this embodiment, the rotary handnut 334 is not axially relatively immovable on a guide member of the male connector part while being manually rotated, as was the handnut 34 in the first embodiment. Rather, as this handnut 334 is rotated it also moves axially forward or backward along the guide portion 344 (i.e., depending of the direction of relative rotation). As the handnut 334 is moved rotationally and axially it effects simultaneous axial movement of a cup member 340 and of the male probe portion 336 by cooperation of the cup member 340 which defines a pair of radially outwardly disposed keys 366. The handnut 334 includes an inner tubular portion 368 which at its inner distal end defines an axially disposed thrust surface 368a. This thrust surface 368a engages the cup member 340 to move this member axially rightwardly, viewing Figures 15 and 16, in response to rightward axial movement of the handnut 334. This relationship of the cup member 340 and the inner tubular portion 368 of actuator 334 allows the cup member to not rotate as actuator 134 is manually rotated, and to transfer axial forces to the male probe portion 336. On the other hand, when the handnut 334 is manually rotated in the opposite direction, and moves in the opposite axial direction along the guide member 344, the handnut applies an opposite axial force to the male probe portion via an axially disposed thrust surface 334c. This thrust surface 334c bears against the elbow and hose barb member 338 to move the male probe member 336 in the opposite axial direction relative to the guide member 344.

In this embodiment, the guide portion 344 includes a tubular extension 344a with a radially outwardly disposed thread 370. The actuator portion 334 defines a matching female thread 372, which threadably engages onto the thread 370. Also in this embodiment, the tubular extension 344a defines a stepped bore 374, having a slightly larger diameter bore portion (indicated by arrowed numeral 374a. The sealing sleeve 358 is provided with a radially outwardly extending, somewhat flexible web part 358c (i.e., an outer portion of flange 358a), which web part is flexible enough to pass through the

smaller diameter portion of bore 374, and into the bore portion 374a. There in the larger diameter bore portion 374a, the somewhat flexible web part 358c moves freely axially, but resists axial withdrawal from this bore portion. Thus, when the actuator 334 is manually turned from the position seen in Figure 13 and toward the position seen in Figure 14, the user experiences a "stop" in the free movement of the actuator when the web part 358c engages an axially disposed step 374b presented at the end of bore portion 374a.

Of course, should the user wish to disassemble the connector part 332, then continued forceful turning of the actuator 334 in the same direction (i.e., in the direction necessary to move the handnut member 334 from the position of Figure 13 toward that of Figure 14) will force the flexible web 358c past this step 374b, and allow the actuator 334 to be unthreaded completely from the guide portion 344. Once the actuator 334 is unthreaded from the guide portion 344, the male probe portion 336 can be manually withdrawn from within the guide portion for inspection and cleaning.

Figures 17 and 18 also illustrate another feature of this embodiment of the invention. In Figure 17, it is seen that the handnut member 334 defines a pair of diametrically opposite and radially outwardly extending protrusions 376 (only one of which is visible in Figure 17) on the forward portion 334b of this member. The guide member 344 defines a radially inwardly extending yieldable catch protrusion 378. As Figure 18 shows, when the handnut 334 is fully rotated in the direction to move the handnut 334 and male probe portion 336 forwardly, one of the protrusions 376 passes under the catch protrusion 378. The catch protrusion 378 yields radially momentarily to allow the particular protrusion 376 to pass circumferentially to the position seen in Figure 18, where this protrusion 376 is trapped by catch protrusion 378. Thus, the connector part 322 will not close of its own accord, nor will it close inadvertently due to such influences as vibration. Manual force can release the protrusion 376 from catch protrusion 378, but the connector part 322 will not inadvertently close.

Each of the alternative embodiments of the present invention offer the advantage of making the coupling parts of such low cost that the female coupling part may be thrown away with the disposable bag-in-box container, or with another type of non-recyclable container. Alternately when used with a recyclable container, such as are those made of glass or durable plastic, then when the container is cleaned the female coupling part may be disposed of and a new one inserted in its place. The male coupling part may be taken apart for cleaning and is thus reusable over a period of time with several different female

coupling parts on successive containers.

While the present invention has been depicted, described, and is defined by reference to two exemplary and particularly preferred embodiments of the invention, such reference does not imply a limitation on the invention, and no such limitation is to be  
5 inferred. The invention is capable of considerable modification, alteration, and equivalents in form and function, as will occur to those ordinarily skilled in the pertinent arts. For example, the present coupling parts can be used with fluids other than food products. These present inventive coupling parts could be used with various liquids, such as chemicals. Photographic chemicals are an example of a liquid other than a food product  
10 with which the present coupling parts could be used. Also, the present coupling invention can be used with other types of vessels and containers in addition to those depicted, described, or referred to specifically herein. For example, bag type vessels can be used with the present coupling parts even if the bag is not disposed in a box. The present coupling parts have a special advantage is such a use because the male and female  
15 coupling portions can be engaged with one another in response to a lateral relative movement and with little applied force. Thereafter, coupling of the male and female coupling structures requires the application of manual rotating forces of rather a low level. In other words, even those individuals of rather low hand strength will be able to apply sufficient relative twisting force to the male coupling member of the present invention so  
20 that engagement and disengagement of this male coupling part is easily accomplished. Consequently, an ease of use of a male and female coupling system of the present type which was not heretofore achievable is provided by the present invention. The present coupling portions can also be used to effect fluid communication between a pair of conduits or a pair of vessels, for example, instead of just between a vessel and a conduit as  
25 depicted. Thus, it is appreciated that the depicted and described preferred embodiment of the invention is exemplary only, and is not exhaustive of the scope of the invention. Consequently, the invention is intended to be limited only by the spirit and scope of the appended claims, giving full cognizance to equivalents in all respects.

## We Claim

1. A male coupling portion of the type configured for use with a female coupling portion to form a fluid-flow coupling structure, each of the male and female coupling portions defining a respective fluid flow path and being removably engageable with one another to communicate the respective fluid flow paths, each coupling portion  
5 including a respective valve element having a respective closed first position closing the respective fluid flow path from ambient, said respective valve elements moving to respective open second positions when said coupling portions are engaged together to communicate said fluid flow paths with one another, said male coupling portion comprising:
  - 10 a guide structure including support means for supportingly and releasably engaging onto the female coupling portion;  
said guide structure including structure for guiding a male probe portion in reciprocation between a first position disengaged from the female coupling portion and a second position in which said male probe portion is engageable into the female coupling  
15 portion when said coupling portions are engaged together;  
a male probe portion reciprocable on said guide structure and carrying said respective valve element of said male coupling portion, and said guide structure and respective valve element including cooperating structure for moving said respective valve element to its open second position in response to reciprocation of said male probe portion  
20 to its said second position;  
an actuator rotationally carried upon said guide structure, said actuator and said male probe portion defining cooperating structure for reciprocating said male probe portion between its said first position and its said second position in response to rotation of said actuator.  
25
2. The male coupling portion of Claim 1 wherein said guide structure includes a pair of diametrically opposite axially extending and arcuate guide tangs.
3. The male coupling portion of Claim 2 wherein said pair of axially extending arcuate guide tangs cooperatively define a substantially circular passage slidably receiving said male probe portion.

4. The male coupling portion of Claim 2 wherein said pair of axially extending arcuate guide tangs each define a pair of circumferentially opposite and axially extending side edges, each side edge of said pair of arcuate guide tangs being in circumferential confrontation with a side edge of the other of said pair of arcuate guide tangs to define an axially extending slot.

5. The male coupling portion of Claim 4 further including said male probe portion carrying a nut member reciprocating with said male probe portion, said nut member including a protrusion extending radially into said axially extending slot and slidably engaging with said circumferentially confronting side edges of said guide tangs to prevent relative rotation of said nut member while allowing axial relative movement.

6. The male coupling portion of Claim 5 wherein said cooperating structure of said actuator and said male probe portion includes said protrusion carrying a section of interrupted male thread radially outwardly disposed on a radially outer surface of the protrusion, said interrupted thread threadably engaging a female thread defined on an inner surface of said actuator member.

7. The male coupling portion of Claim 6 wherein said nut member includes a pair of diametrically opposite protrusions, each of said pair of protrusions carrying a respective one of a pair of interrupted male thread sections, and said actuator member includes a double-start thread engaging each of said pair of interrupted thread sections.

8. The male coupling portion of Claim 4 wherein said guide portion and said actuator member further define cooperating structure for allowing relative rotation of said actuator member while preventing axial relative movement.

9. The male coupling portion of Claim 8 wherein said cooperating structure of said guide portion and said actuator includes said guide portion defining a radially and circumferentially extending groove, said actuator including a radially and circumferentially extending rib received rotationally into said groove and preventing axial relative movement of said actuator on said guide portion.

10. The male coupling portion of Claim 9 wherein said guide portion includes a reentrant collar portion cooperating with a remainder portion of said guide portion to define an axially extending groove, said collar portion defining said radially and circumferentially extending groove of said guide portion.

11. The male coupling portion of Claim 1 wherein said cooperating structure of said guide structure and respective valve element for moving said respective valve element to its open second position in response to reciprocation of said male probe portion to its said second position includes said respective valve element being of generally tubular  
5 configuration and being slidably received on said male probe portion, said valve element further defining a radially outwardly extending flange engaging said guide portion upon reciprocation of said male probe portion to its second position.

12. The male coupling portion of Claim 4 further including said male probe portion carrying a thrust collar member reciprocating with said male probe portion, said thrust collar member and said actuator member including cooperating structure for transferring axial force therebetween while allowing relative rotation so that said thrust  
5 collar moves axially in unison with said actuator member.

13. The male coupling portion of Claim 12 wherein said cooperating structure of said thrust collar member and of said actuator includes said thrust collar having a pair of radially outwardly extending protrusions, and said actuator including a pair of axially spaced apart radially extending flanges receiving said protrusions therebetween.

14. The male coupling portion of Claim 4 wherein said guide portion and said actuator member further define cooperating structure for allowing relative rotation of said actuator member while simultaneously causing axial relative movement.

15. The male coupling portion of Claim 14 wherein said cooperating structure of said guide portion and said actuator member includes said guide portion defining a male thread and said actuator including a female thread threadably engaging said male thread so that said actuator moves axially along said guide portion in response to relative rotation to  
5 transfer axial force to a non-rotational thrust collar.



16. The male coupling portion of Claim 15 wherein said actuator includes a tubular portion received into said axial passage of said guide portion, said tubular portion and thrust collar defining cooperating structure for allowing relative rotation of said actuator member while transferring axial force to said thrust collar.

17. The male coupling portion of Claim 1 wherein said respective valve member of said male coupling portion includes a sealing sleeve member which is slidably carried on said male probe portion, said male probe portion defining an axially extending part of said respective fluid flow path of said male coupling portion and also defining an aperture opening laterally outwardly thereon, said sealing sleeve member in said closed first position spanning and closing said aperture, said sealing sleeve member including a radially outwardly extending element engageable with said guide portion upon forward reciprocation of said male probe portion to stop further forward motion of said sealing sleeve member so that said male probe portion continues forward toward said female coupling portion to uncover said aperture.

18. A coupling structure with male and female coupling structure portions each defining a fluid flow path, and each removably engageable with the other to open fluid communication therebetween, and said coupling portions also being disengageable from one another to close communication between each fluid flow path and ambient, each one of the male and female portions of the having a respective movable valve member in a first position closing communication with ambient and in a second position opening communication between the fluid flow paths of the engaged coupling portions, the male coupling portion comprising:

a guide structure including support structure for releasably engaging onto the female coupling portion so that the fluid flow passages of each coupling portion are axially aligned, said guide structure including structure for guiding a male probe portion in reciprocation between a first position disengaged from the female coupling portion and in which the respective valve member is in its closed first position and a second position in which said male probe portion is engaged into the female coupling portion and both said respective valve members are moved to their opened second positions;

said male probe portion being reciprocable on said guide structure and carrying

-24-

said respective valve element of said male coupling portion, and said guide structure and respective valve element including cooperating structure for moving said respective valve element axially of said male probe portion to its open second position in response to reciprocation of said male probe portion to its said second position relative to said guide structure; and

an actuator rotationally carried upon said guide structure, said actuator and said male probe portion defining cooperating structure for reciprocating said male probe portion between its said first position and its said second position in response to rotation of said actuator relative to said guide structure.

19. A method of effecting fluid flow communication between a pair of flow paths, and of isolating the flow paths from ambient when not in communication with one another, said method comprising steps of:

providing a female coupling structure having an axially extending fluid flow path, and a plug member in a closed first position spanning and closing this flow path, providing for said plug member to move axially to an opened second position;

providing a male coupling structure having an axially extending fluid flow path, and engaging said male coupling onto said female coupling structure with said fluid flow paths in axial alignment;

providing said male coupling structure with a guide member engageable with said female coupling structure, and a male probe portion defining said fluid flow path of said male coupling structure and reciprocable relative to said guide member; forming a port opening laterally from said flow path on said male probe portion, and disposing a respective axially movable tubular valve member in a first position spanning and closing said port to close communication with ambient and in a second position opening communication between the fluid flow path of the engaged coupling structures;

providing an actuator rotationally carried upon said guide member, defining in cooperation between said actuator and said male probe portion a cooperating structure for reciprocating said male probe portion between its said first position and its said second position in response to rotation of said actuator relative to said guide member; and engaging said male and said female coupling structures, and relatively rotating said actuator to effect axial relative movement of said male probe portion so that said fluid flow paths are communicated with one another.

-25-

20. A two-part fluid coupling structure having a female coupling part for fluid-flow communication with a vessel, and a male coupling part for fluid-flow communication with a conduit, said coupling parts being mutually engageable to effect fluid-flow communication between said vessel and said conduit, and being disengageable to both  
5 discontinue said fluid-flow communication and also to mutually close fluid-flow communication between ambient and each of said vessel and conduit; said two-part coupling structure comprising:

said female coupling part having:

10 a female cap member defining a through passage communicating between ambient and said vessel;

a disk-like plug member spanning and closing said through passage of said cap member.

said male coupling part having:

15 an elongate probe member defining a blind axial passage for fluid-flow communication with said conduit, a lateral aperture adjacent to a forward end of said probe member and opening outwardly from said axial passage on said probe member, and a head portion adjacent to a forward end of said probe member for engaging with said plug member;

20 a sleeve valve member carried slidably on said probe member between a first position across and closing said lateral aperture and a second position at least partially rearwardly of and opening of said lateral aperture, said sleeve valve member having a radially outwardly extending portion at a rear end thereof

25 a guide structure reciprocably carrying said probe member and said sleeve member, said guide structure including a forward flange portion having a central opening therein, and means for engaging supportingly upon said cap member with said central opening in alignment with said through bore of said cap member, means for defining a guide way  
30 for said probe and sleeve member to allow reciprocation thereof via said central opening into and from said through bore of said female coupling part, said guide structure defining an abutment surface engaged by said radially outwardly extending portion of said sleeve member to stop relative motion thereof upon a certain advancement of said male coupling part

-26-

35 probe member relative to said forward flange portion, said probe member of said male coupling part continuing in forward advancement relative to said forward flange portion to move relative to said sleeve valve member to said second position thereof with said lateral aperture at least partially uncovered; and

40 an actuator rotationally carried upon said guide member and defining cooperating structure with said male probe portion for reciprocating said male probe portion relative to said guide member between its said first position and its said second position in response to rotation of said actuator relative to said guide member.

-27-

21. A male coupling assembly for use with a cooperatively configured female coupling assembly to form a fluid flow connection therebetween when the coupling assemblies are engaged together, said male coupling assembly comprising:

5 a guide structure having at a forward end thereof means for mounting to the female coupling assembly in axial alignment, said guide structure further defining a guide way leading toward and aligning with the female coupling assembly,

an elongate male probe member reciprocally received in said guide way in alignment with the female coupling assembly, said male probe member defining a blind axially extending passage leading to a lateral port opening outwardly on said male probe member  
10 near a forward end of said male probe member;

a sleeve valve member reciprocally carried upon said male probe member, said sleeve valve member being reciprocable between a first position spanning and closing said lateral port and a second position spaced from said forward end of said male probe member to open said lateral port;

15 actuator structure for reciprocating said male probe member between a first position within said guide structure and a second position in which at least a portion of the male probe member extends forwardly of said guide structure and is there engageable with a female coupling assembly;

said sleeve valve member and said guide structure having cooperating structure for  
20 stopping forward movement of said sleeve valve member with said male probe member upon reciprocation of said male probe member toward its second position so that said male probe member continues toward said second position thereof and said sleeve valve member is moved relative to said male probe member to the second position of said sleeve valve member;

25 said actuator structure including a sleeve-like hand nut rotationally carried upon said guide structure.

22. A connector structure with male and female connector parts each defining an axially extending fluid flow path, and each removably engageable with the other to open fluid communication therebetween, and said connector parts also being disengageable from one another to close communication between each fluid flow path and ambient, each one of the male

-28-

5 and female parts having a respective movable valve member in a first position closing communication with ambient and in a second position opening communication between the fluid flow paths of the engaged connector parts, the male connector part comprising:

a guide structure including support structure for releasably engaging onto the female connector portion in response to lateral relative movement of the connector parts so that the axially extending fluid flow passages of each connector portion are axially aligned, said guide structure including structure for guiding a male probe portion in reciprocation between a first position disengaged from the female connector portion and in which the respective valve member is in its closed first position and a second position in which said male probe portion is engaged into the female connector portion and both said respective valve members are moved to their opened second positions;

said male probe portion being reciprocable on said guide structure and carrying said respective valve element of said male connector part, said respective valve element of said male connector part having a surface axially engageable with said female connector part to stop forward reciprocation of said valve element in unison with said male probe portion; and

20 a manually rotational actuator carried upon said guide structure, said actuator and said male probe portion defining cooperating structure for reciprocating said male probe portion between its said first position and its said second position in response to rotation of said actuator relative to said guide structure.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
1 February 2001 (01.02.2001)

PCT

(10) International Publication Number  
WO 01/07331 A1

- (51) International Patent Classification<sup>7</sup>: B65D 25/40
- (21) International Application Number: PCT/US99/16641
- (22) International Filing Date: 23 July 1999 (23.07.1999)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): SCHOLLE CORPORATION [US/US]; 19500 Jam-boree Boulevard, Irvine, CA 92715 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SAVAGE, Chester [US/US]; 6 Harvest, Irvine, CA 92604 (US); ANDER-SON, Mark [AU/US]; 587 Cardiff, Irvine, CA 92606 (US); SANDVOSS, Silvio [US/US]; 23481 Bending Oak Court, Murrieta, CA 92562 (US).
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the begin-ning of each regular issue of the PCT Gazette.
- (74) Agent: MILLER, Terry, L.; 24832 Via San Fernando, Mission Viejo, CA 92692 (US).

(54) Title: FLUID COUPLING WITH ROTARY ACTUATION

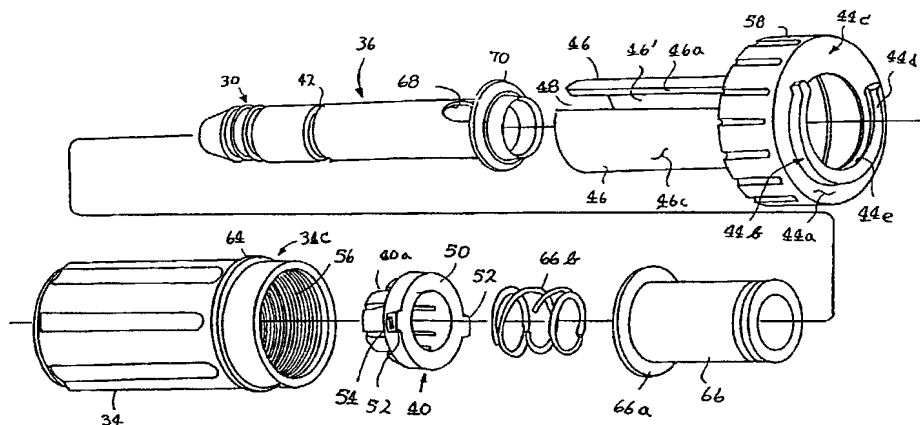

(57) Abstract: A two-part coupling structure (22, 32) includes a male coupling part (32) and a female coupling part (22) which are mutually engageable to open fluid communication between the coupling parts (22,32). For example, the coupling parts (22, 32) may be used to establish fluid communication between a container (12) and a conduit (14). The coupling parts (22, 32) are disengageable from one another to discontinue fluid communication between them, and also to close communication between ambient and each of the container (12) and the conduit (14). The male coupling part (32) includes a mounting structure (44a-44e) for supporting on the female coupling part (32), and also includes a guide structure (44) effective to guide a male probe portion (36) of the male coupling part (32) into engagement with the female coupling part (22). A rotary actuator member (34), preferably in the form of a handnut is included in the male coupling part (32), and is effective upon rotation of cause axial relative movement of the male probe portion (36) into or out of engagement with the female coupling part (22). A considerably lowered manual engagement and disengagement force is provided, along with increased convenience and ease of use for the coupling structure.

WO 01/07331 A1

FIG. 1.

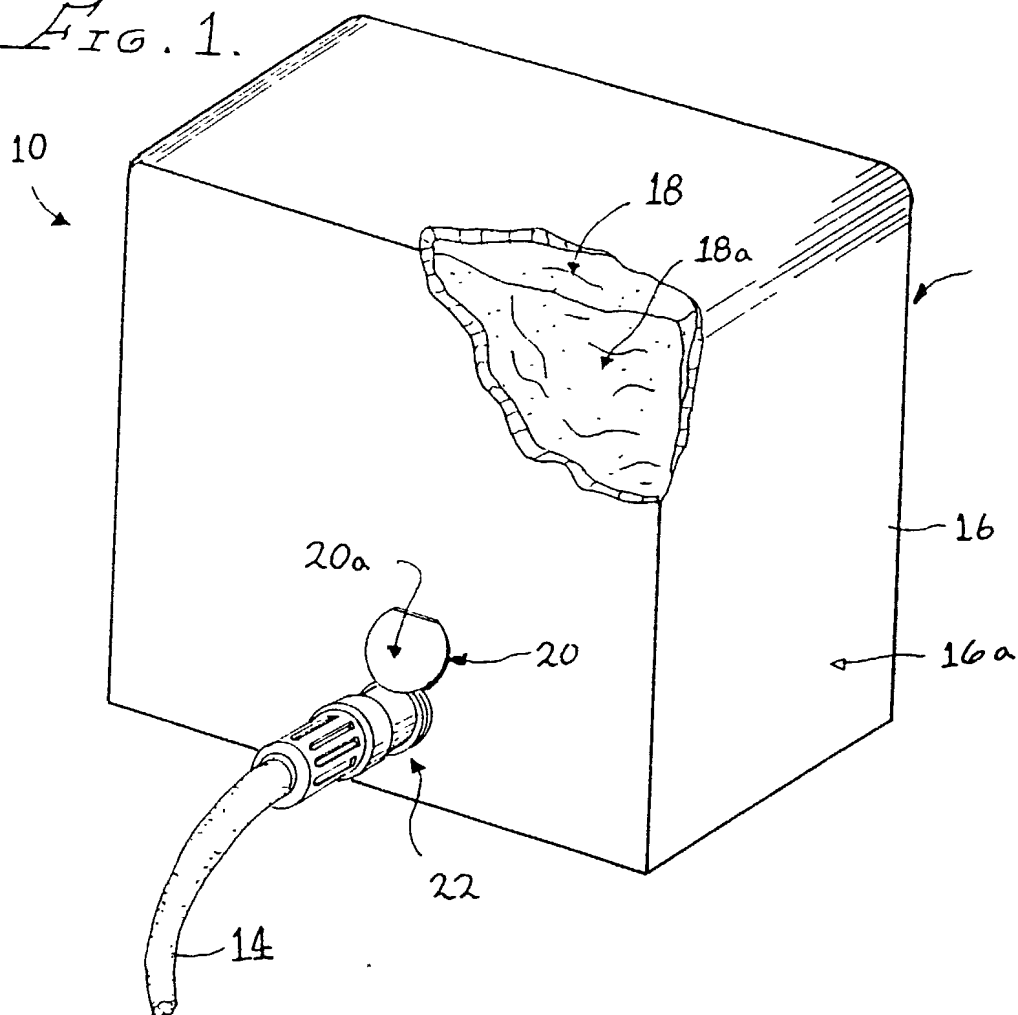


FIG. 2.

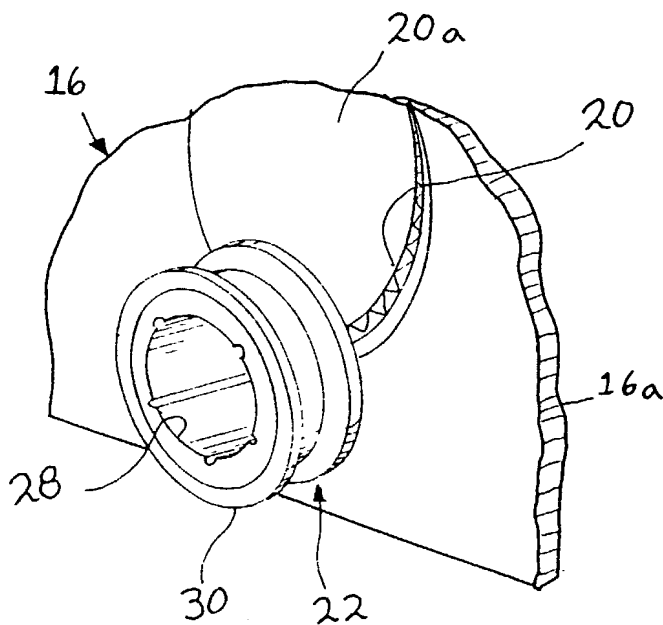




FIG. 5.

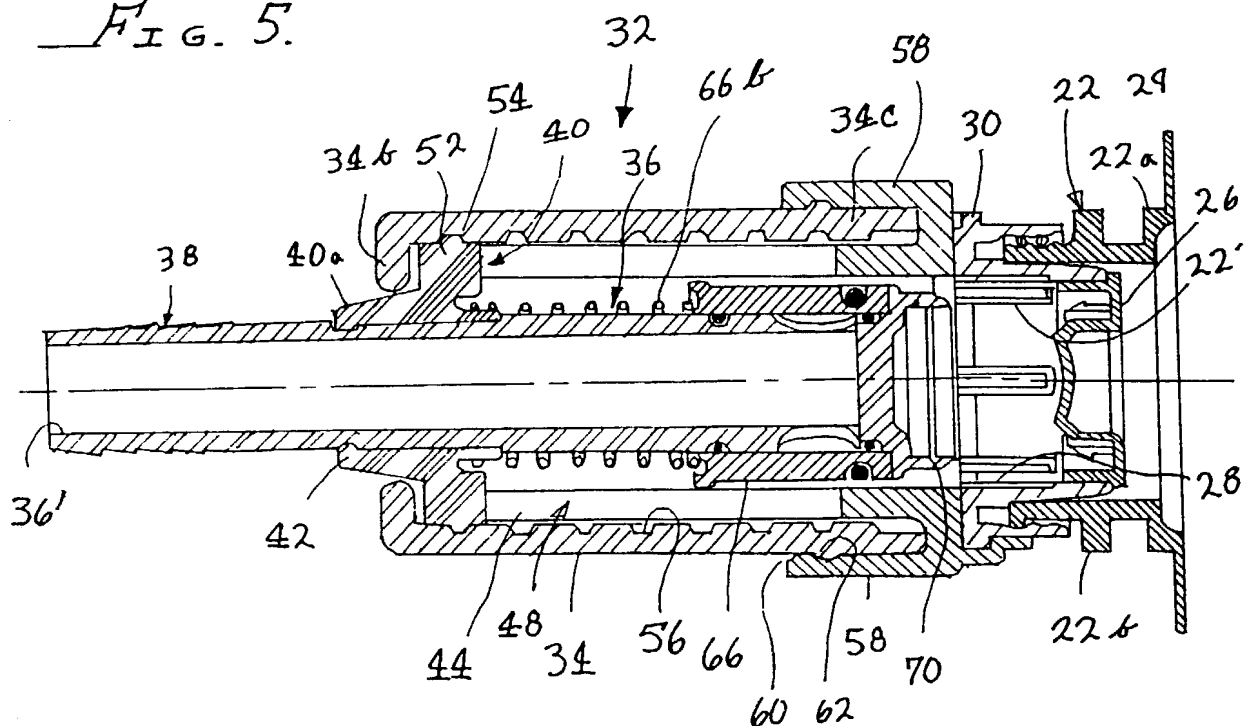
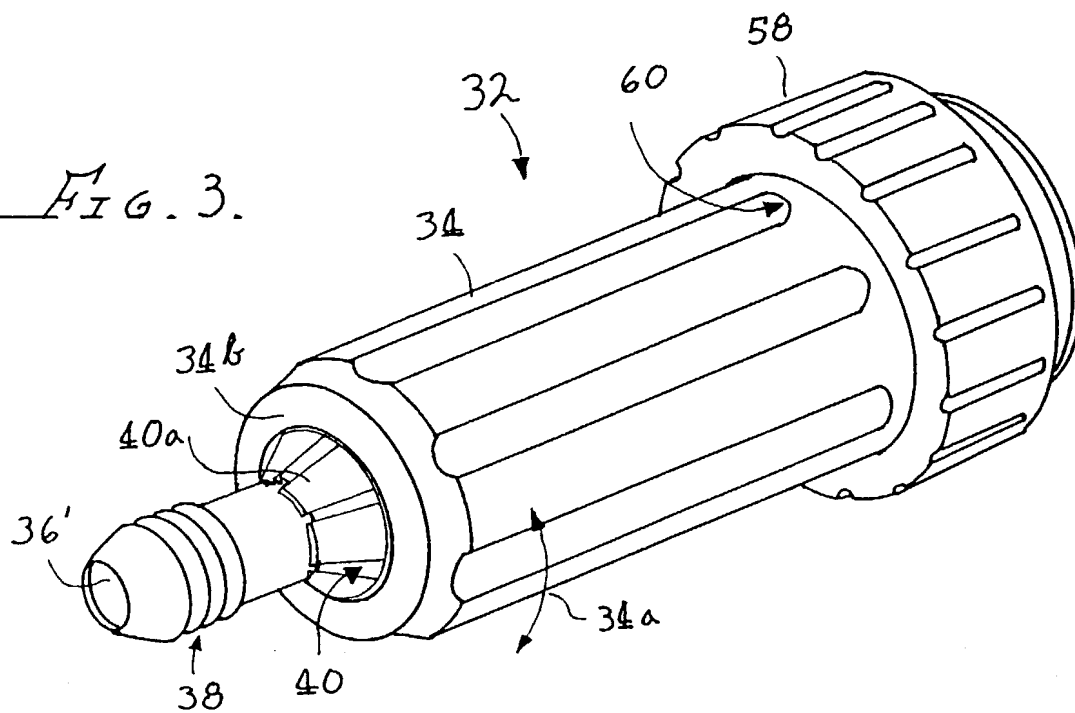


FIG. 3.



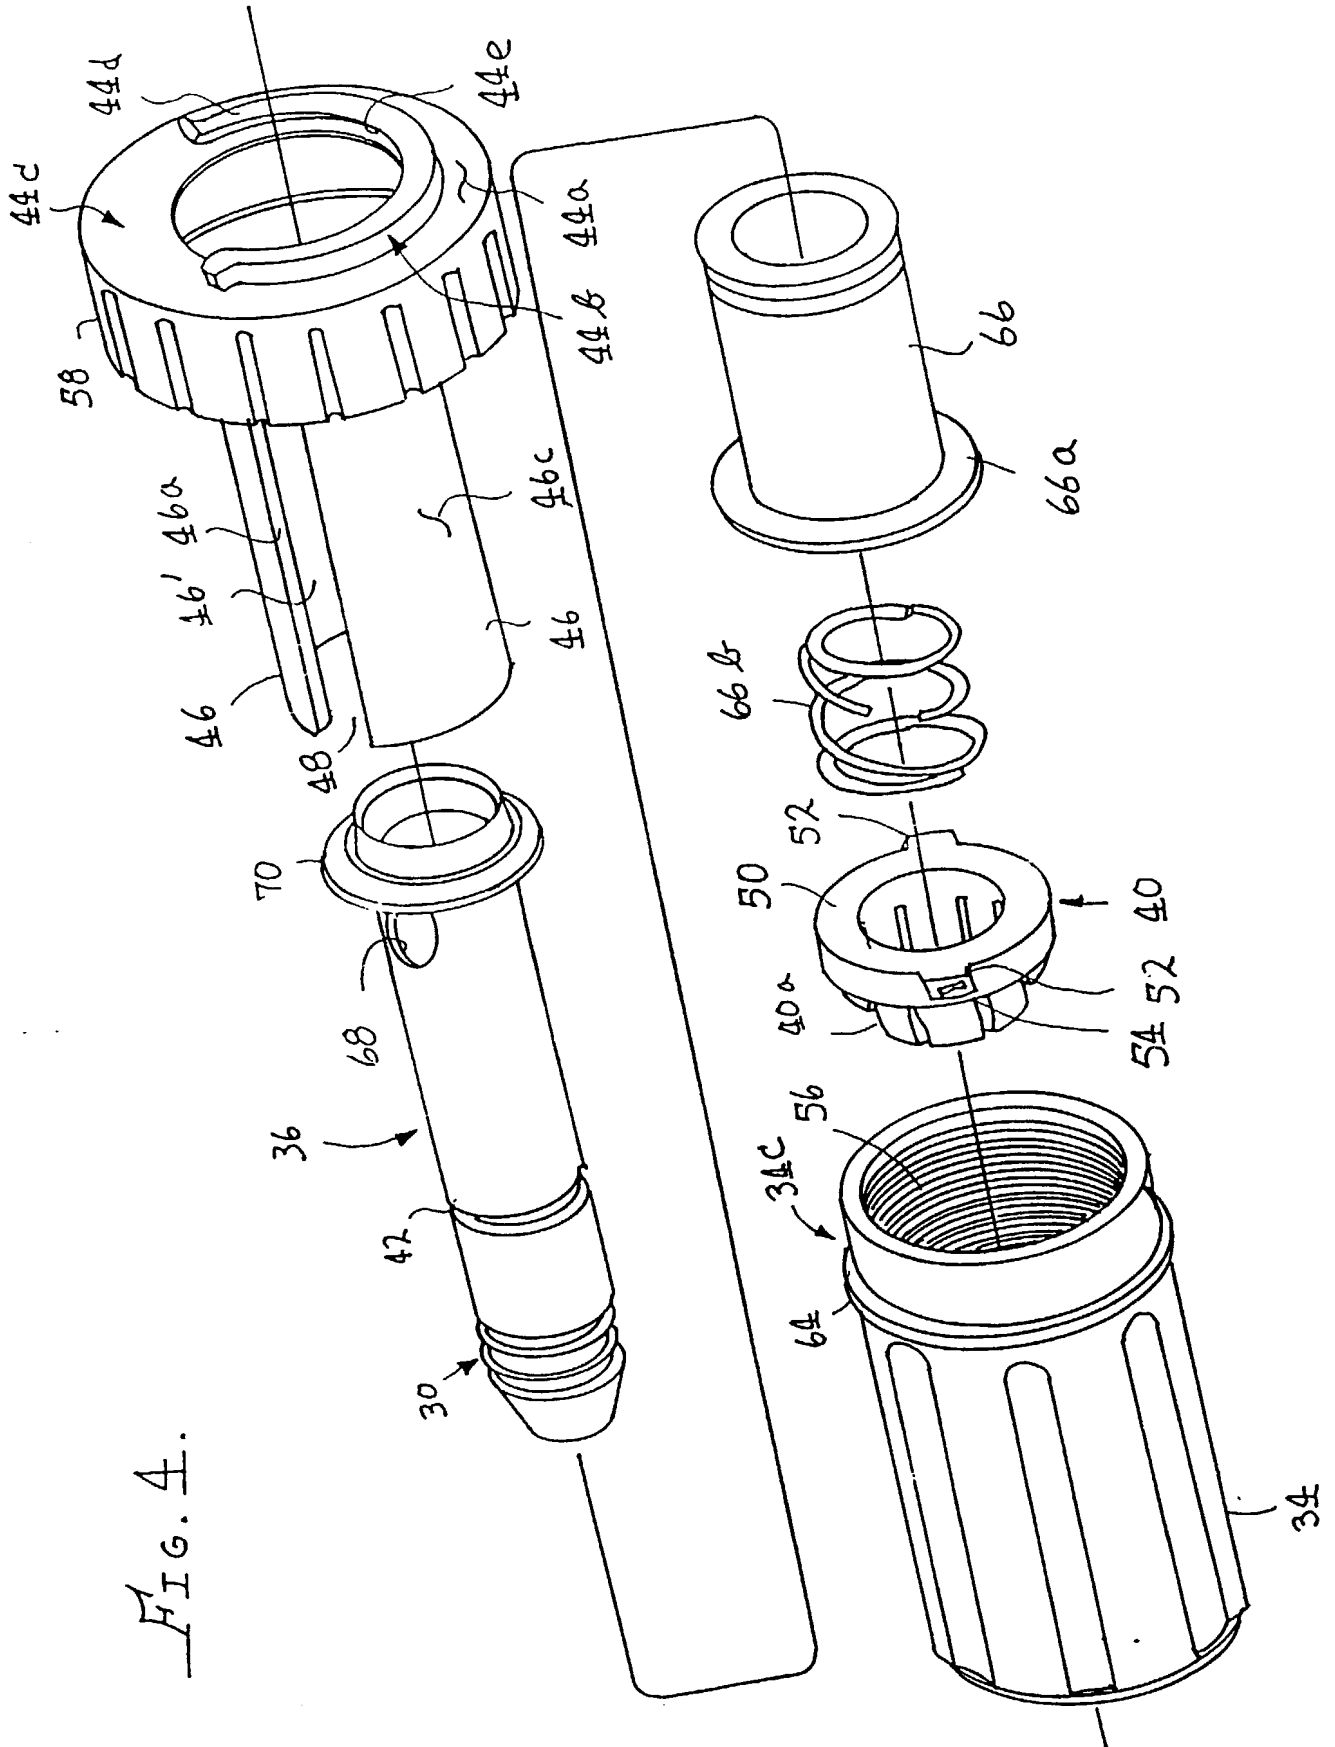
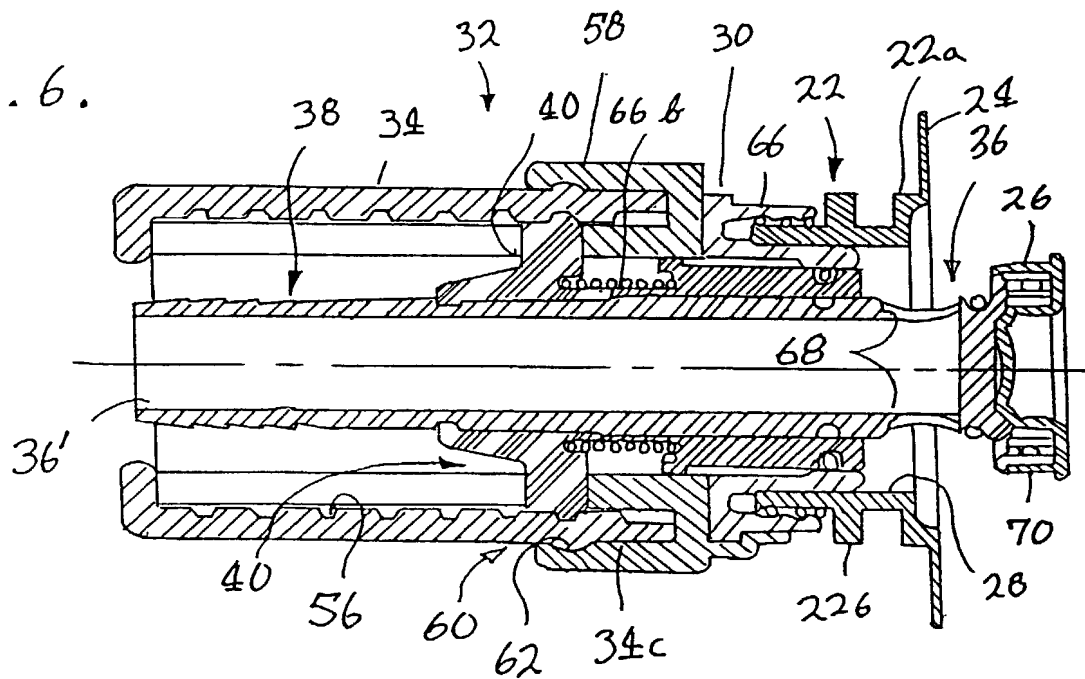
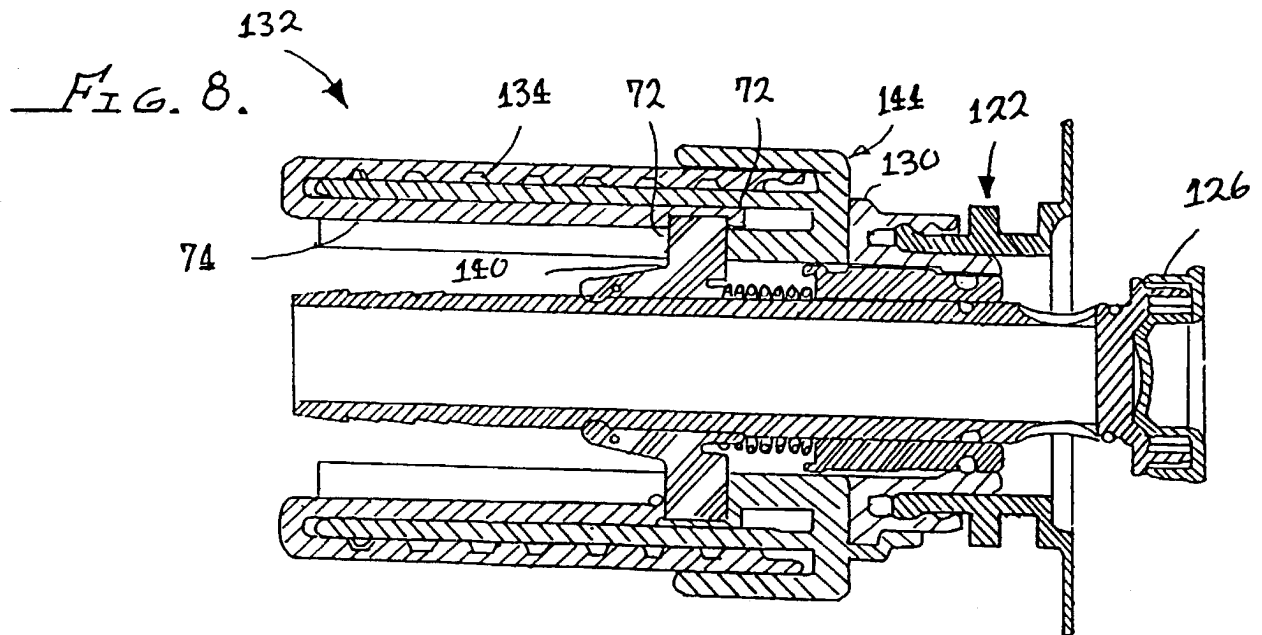
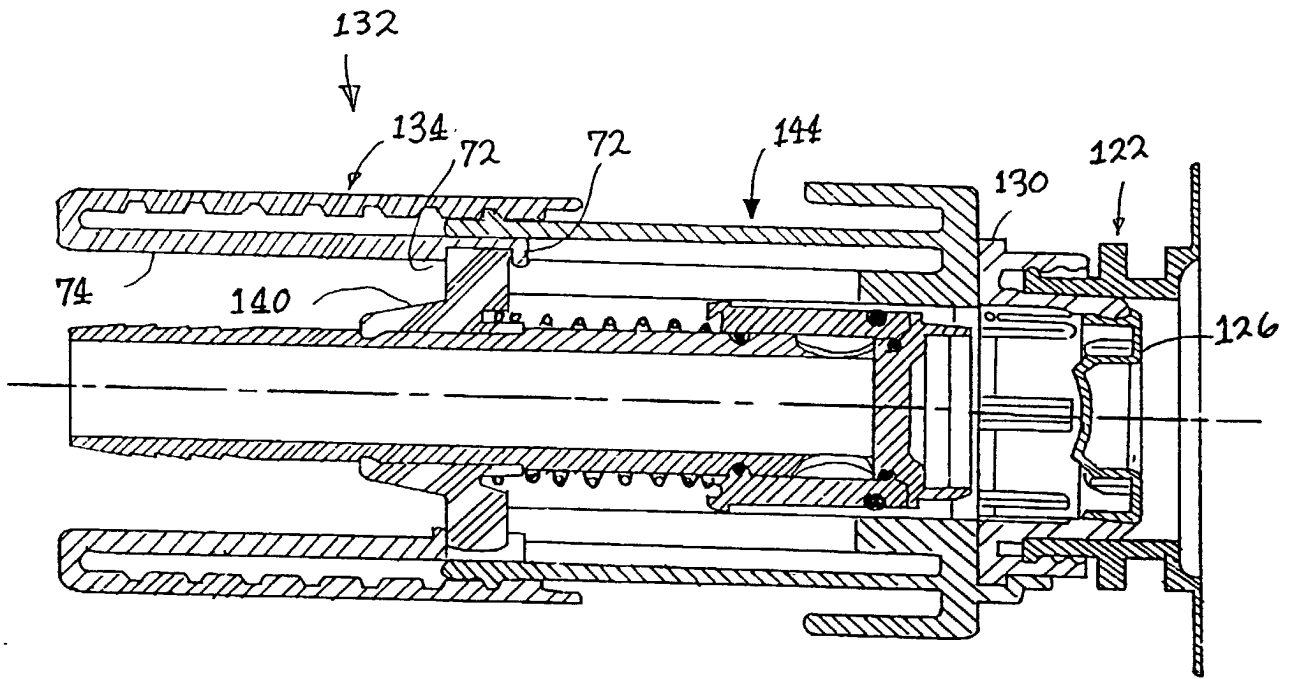
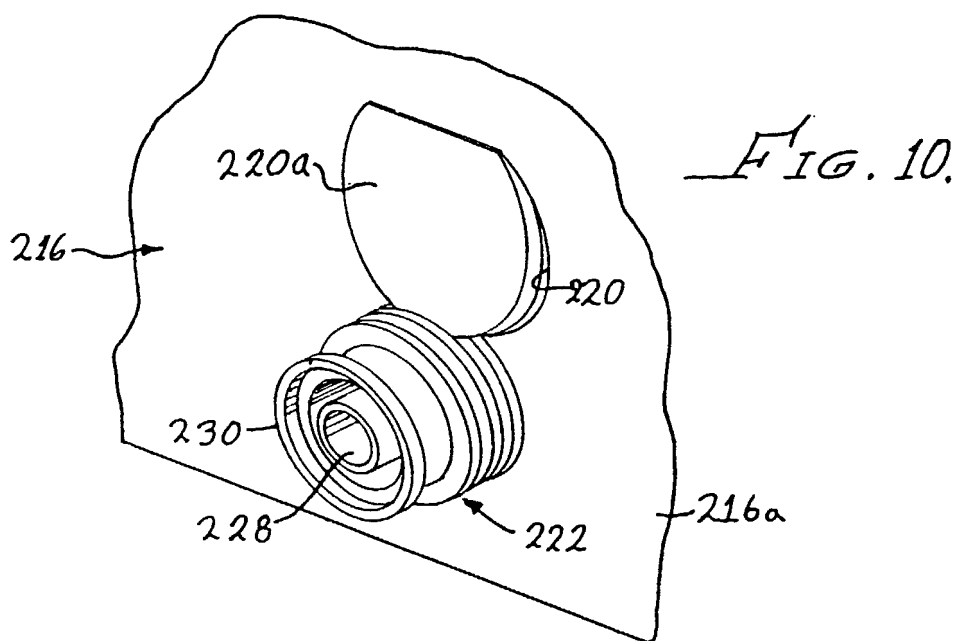
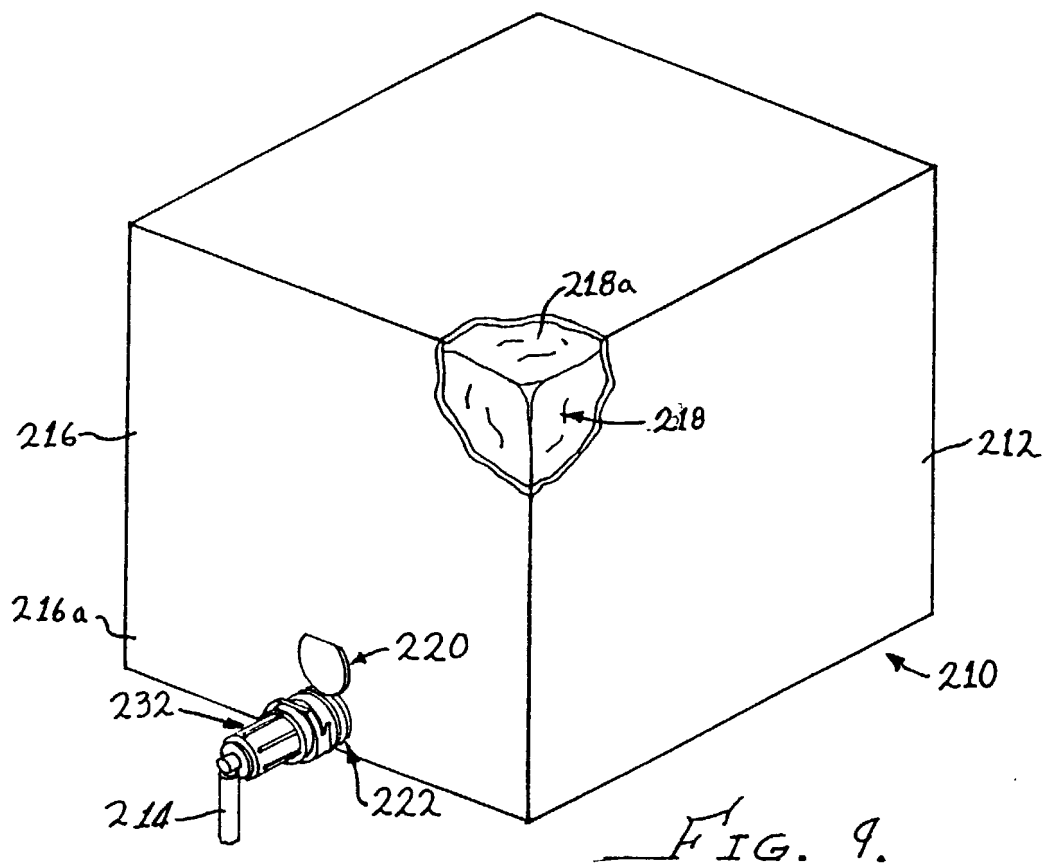




FIG. 4.

FIG. 6.







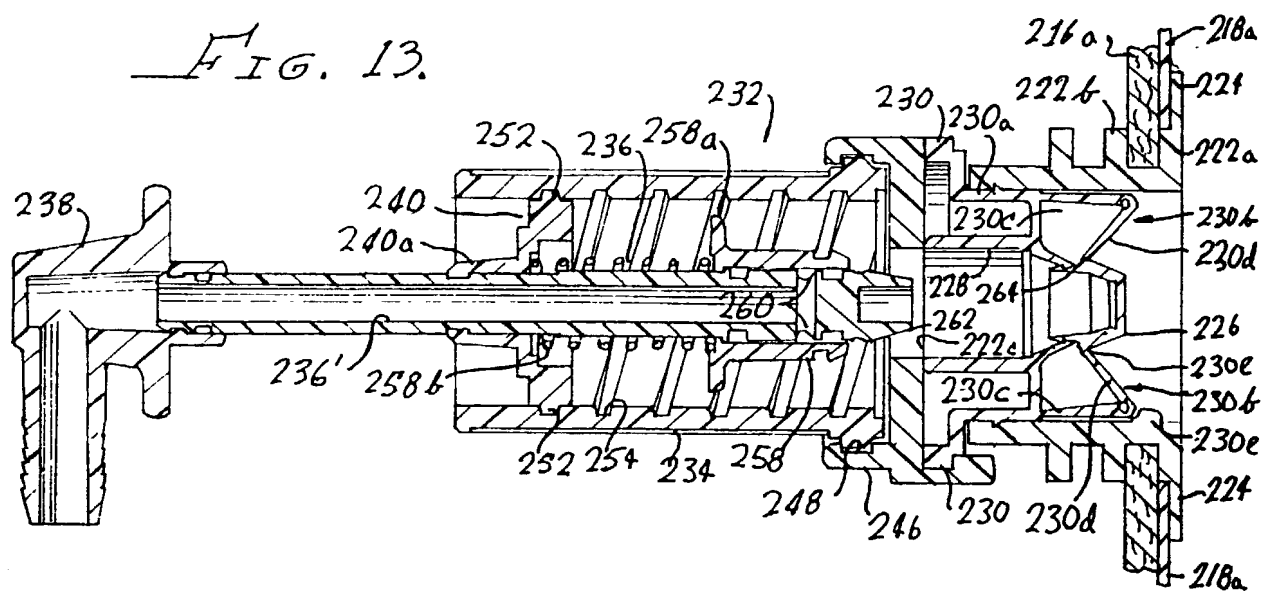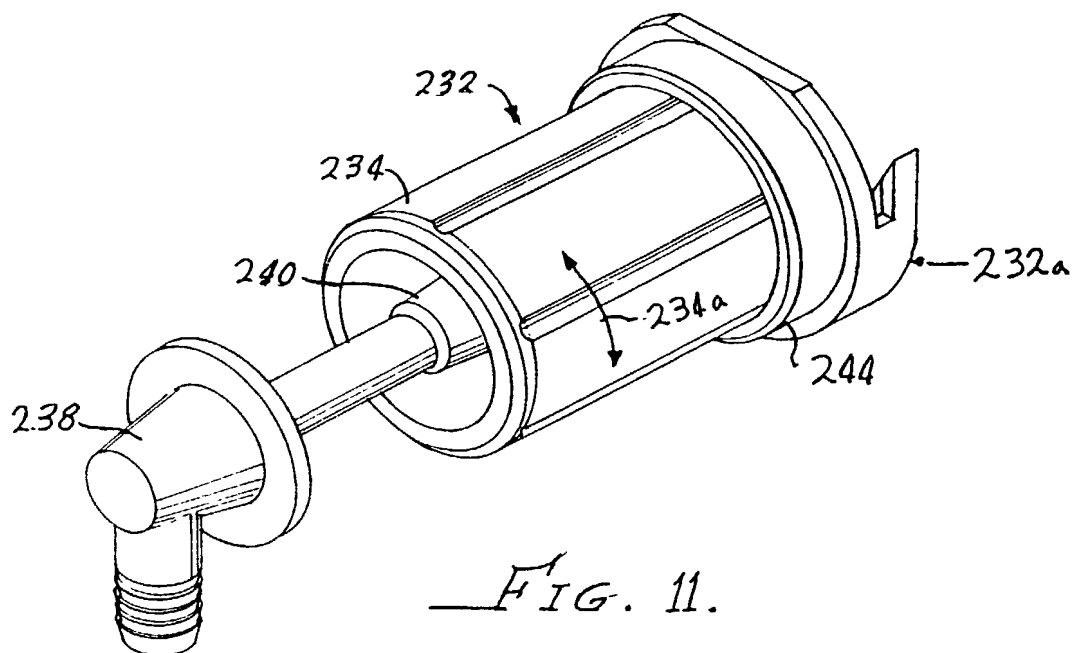

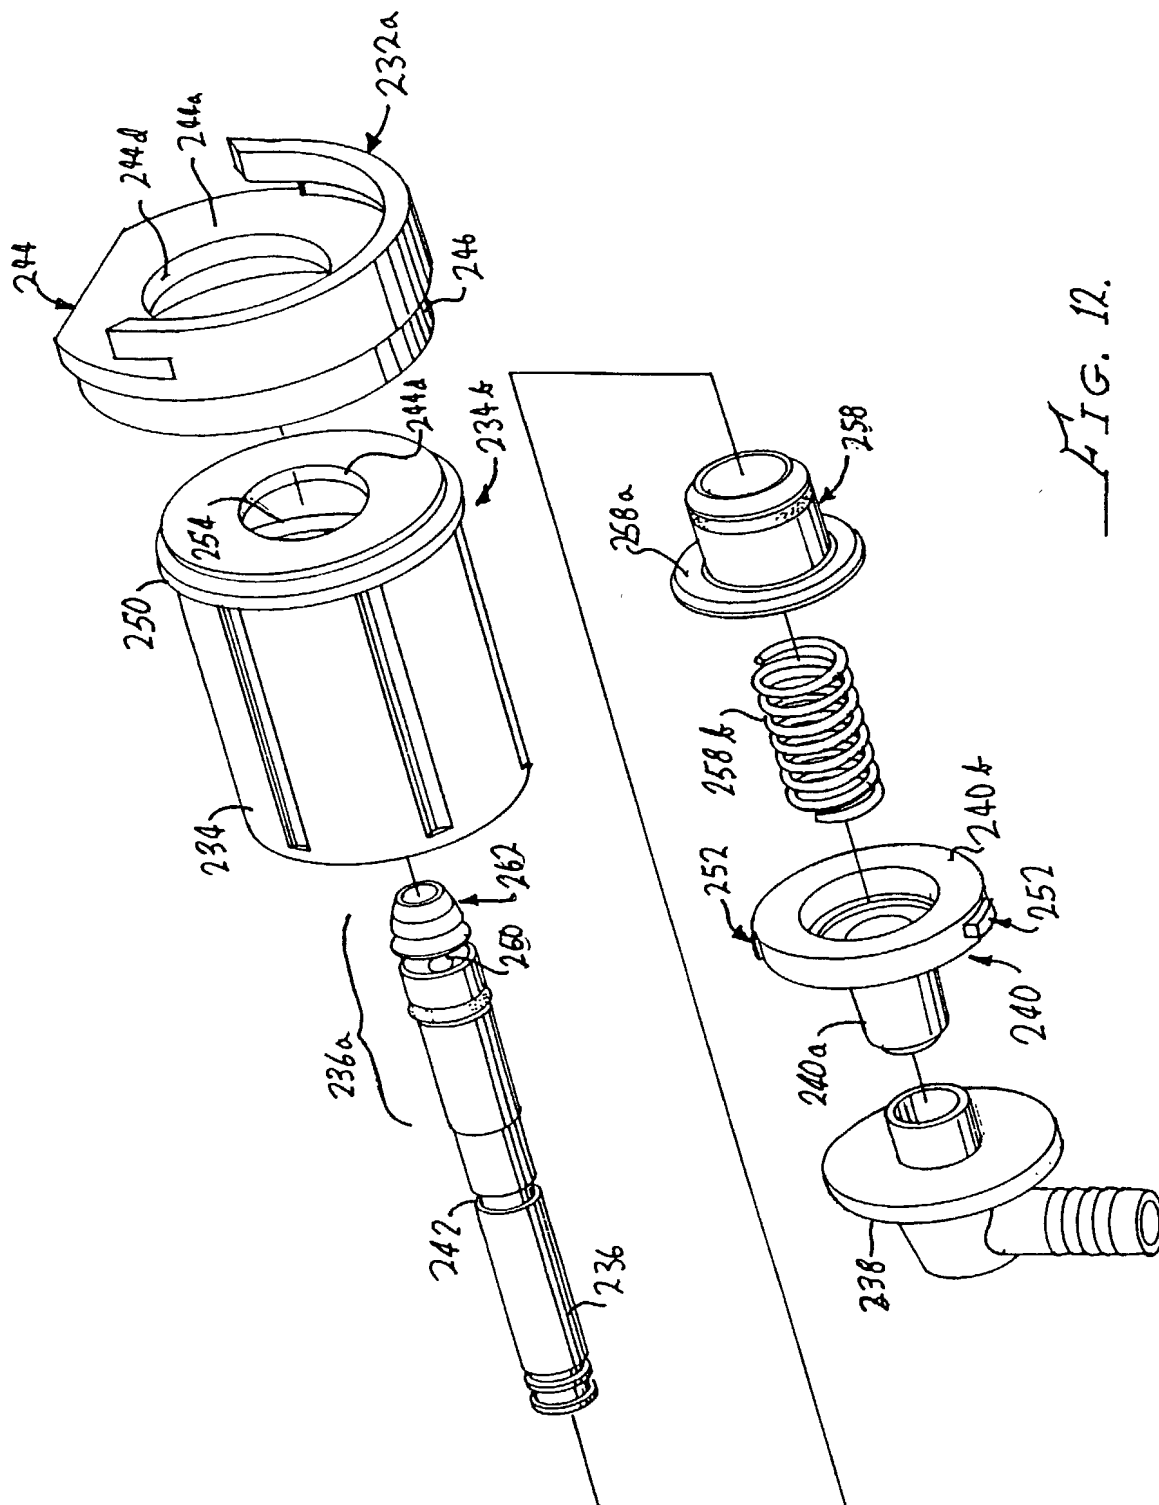


FIG. 12.

FIG. 14.

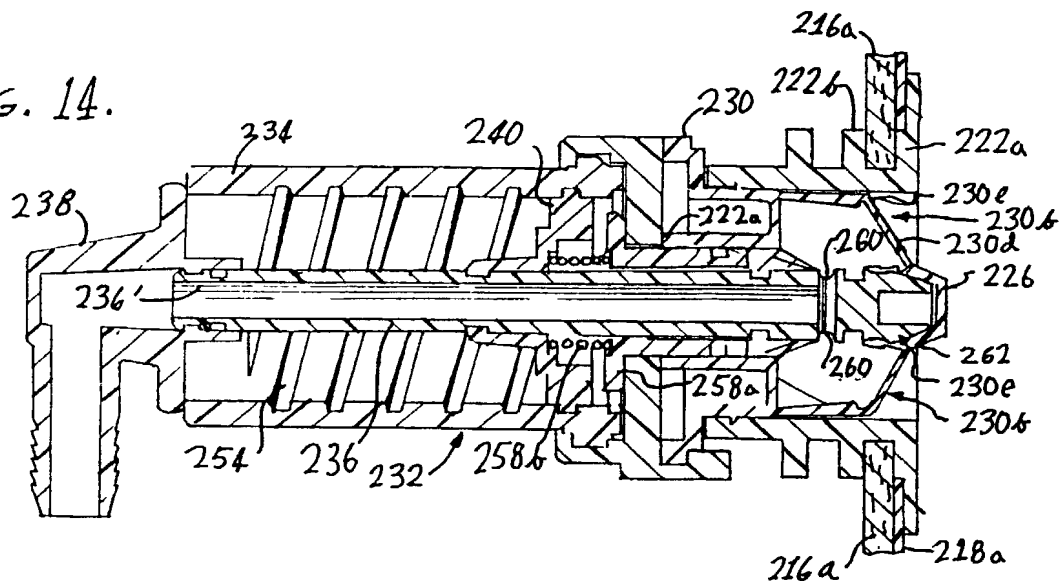


FIG. 15.

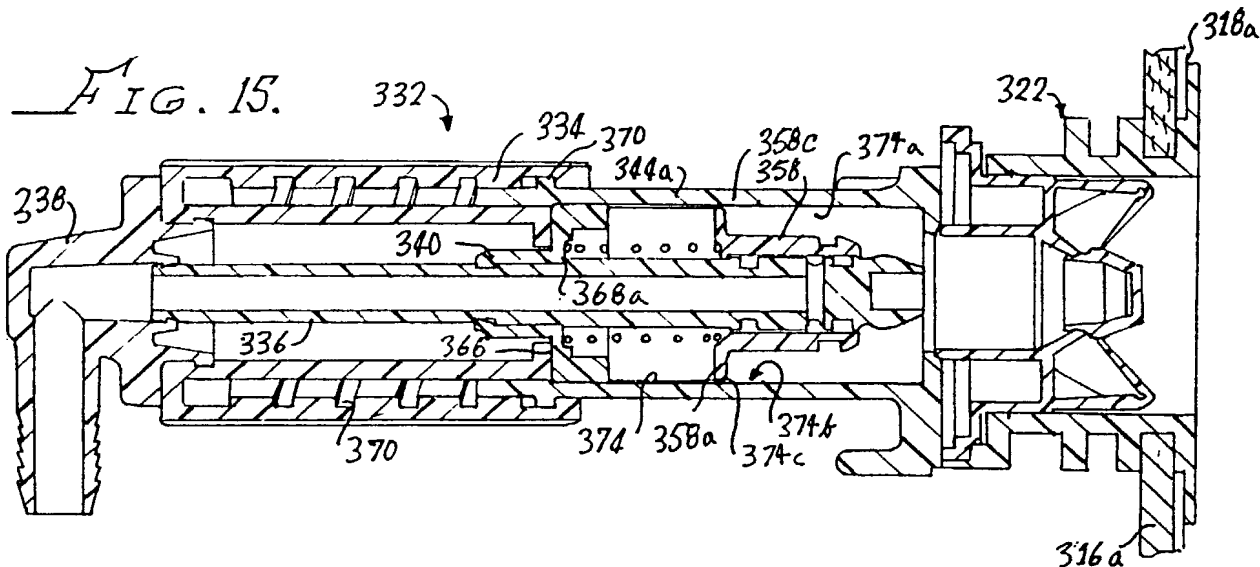
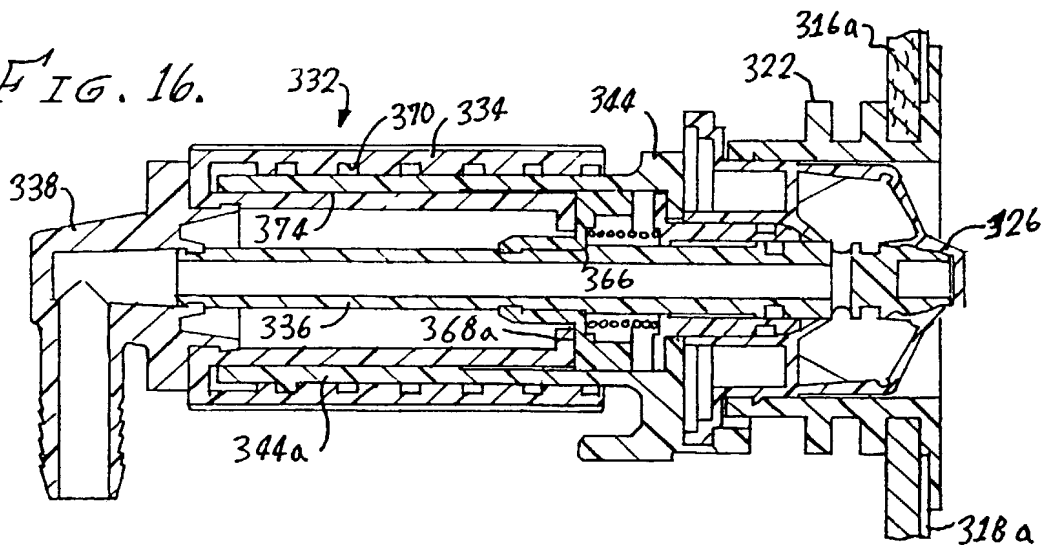


FIG. 16.





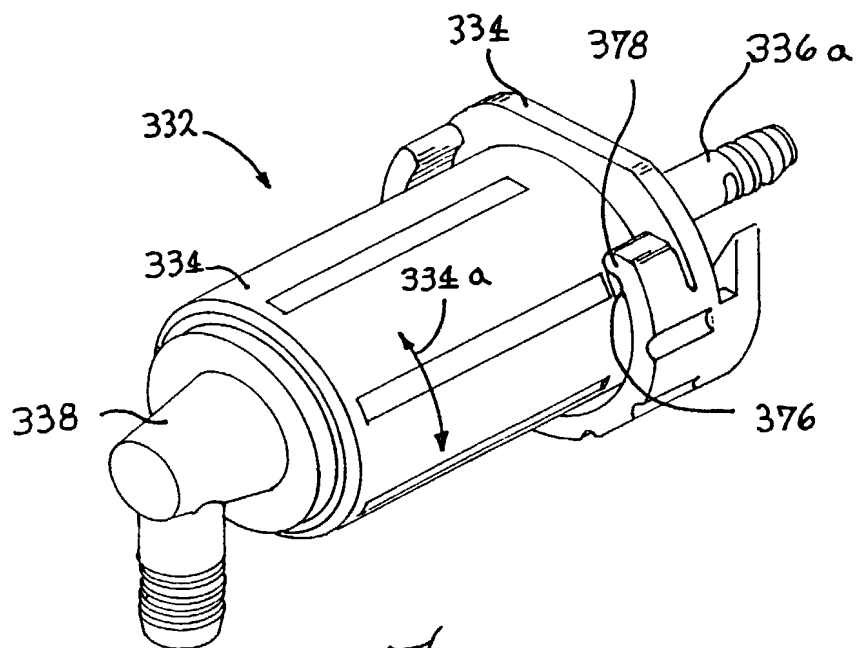


FIG. 18

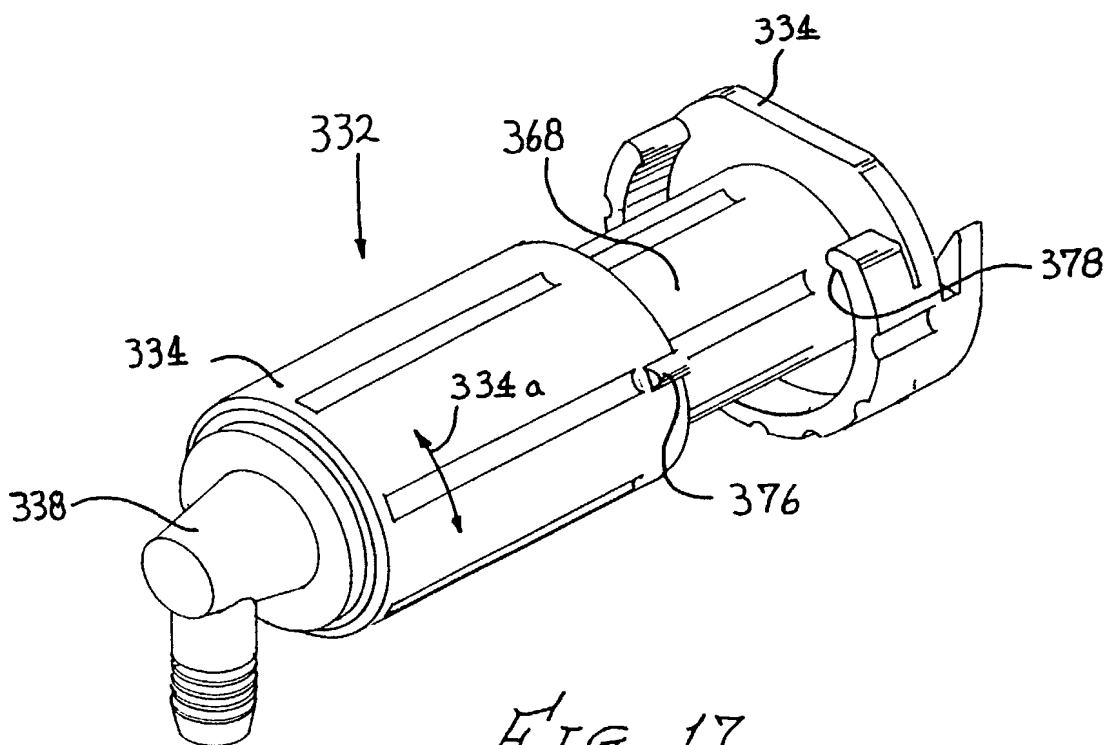


FIG 17



PATENT  
Docket No. 490113-148

## COMBINED DECLARATION AND PETITION

As a below named inventor, I hereby declare that:

This declaration is of the following type:

- |                                     |                       |                          |                      |
|-------------------------------------|-----------------------|--------------------------|----------------------|
| <input type="checkbox"/>            | original              | <input type="checkbox"/> | divisional           |
| <input type="checkbox"/>            | design                | <input type="checkbox"/> | continuation         |
| <input type="checkbox"/>            | supplemental          | <input type="checkbox"/> | continuation-in-part |
| <input checked="" type="checkbox"/> | national stage of PCT |                          |                      |

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled Fluid Coupling with Rotary Actuation, the specification of which:

- (a) ☐ is attached hereto
- (b) ☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).
- (c) ☒ was described and claimed in PCT International Application No. PCT/US99/16641, filed on July 23, 1999 and as amended under PCT Article 19 on \_\_\_\_\_ (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.


I hereby claim foreign priority benefits under 35 USC 119 (a) - (d), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by check the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s) or any PCT international application having a filing date before that of the application of which priority is claimed.


- (d) ☐ no such applications have been filed
- (e) ☒ such application have been filed as follows:


Prior Foreign Application Number(s)	Country (or indicate if PCT)	Date of Filing (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?
PCT/US99/16641	PCT	07/23/1999	<input type="checkbox"/>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
			<input type="checkbox"/>	<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/>	<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/>	<input type="checkbox"/> Yes <input type="checkbox"/> No

PATENT  
Docket No. 490113-148

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor: <b>SAVAGE, Chester</b>	
Inventor's Signature: 	Date Signed: <b>2/5/62</b>
Residence (City, State and/or Country): <b>Irvine, California 92604 US</b>	Citizenship: <b>US</b>
Post Office Address (Street, City, State, Zip Code, Country): <b>6 Harvest, Irvine, California 92604 US</b>	

Full Name of Second Inventor: <b>ANDERSON, Mark</b>	
Inventor's Signature: 	Date Signed: <b>8 MAY 2002</b>
Residence (City, State and/or Country): <b>Mitcham, South Australia SA, AUA</b>	Citizenship: <b>AU</b>
Post Office Address (Street, City, State, Zip Code, Country): <b>1/22a Broughton Avenue, Mitcham, South Australia, 5062</b>	

Full Name of Third Inventor: <b>SANDVOSS, Silvia</b>	
Inventor's Signature: 	Date Signed: <b>7/2/62</b>
Residence (City, State and/or Country): <b>Murrieta, California 92562 US</b>	Citizenship: <b>US</b>
Post Office Address (Street, City, State, Zip Code, Country): <b>23481 Bending Oak Court, Murrieta, California 92562 US</b>	